

# FEMALE STRAIGHT HEADER SMT PCB TO PCB




## 0825 SERIE. 0.80 mm. (0.032"). For PCB to PCB Connections.

### Features

- Available in 8 to 50 circuits
- Insulator material: Polyester UL 94V-0
- Mates with male header 0824 serie
- Phosphor bronze contacts
- Available in different length
- With or without fixation pivots
- Temperature rating: -40° to 105°C
- For other options consult the Sales Office

### Dimensional information:

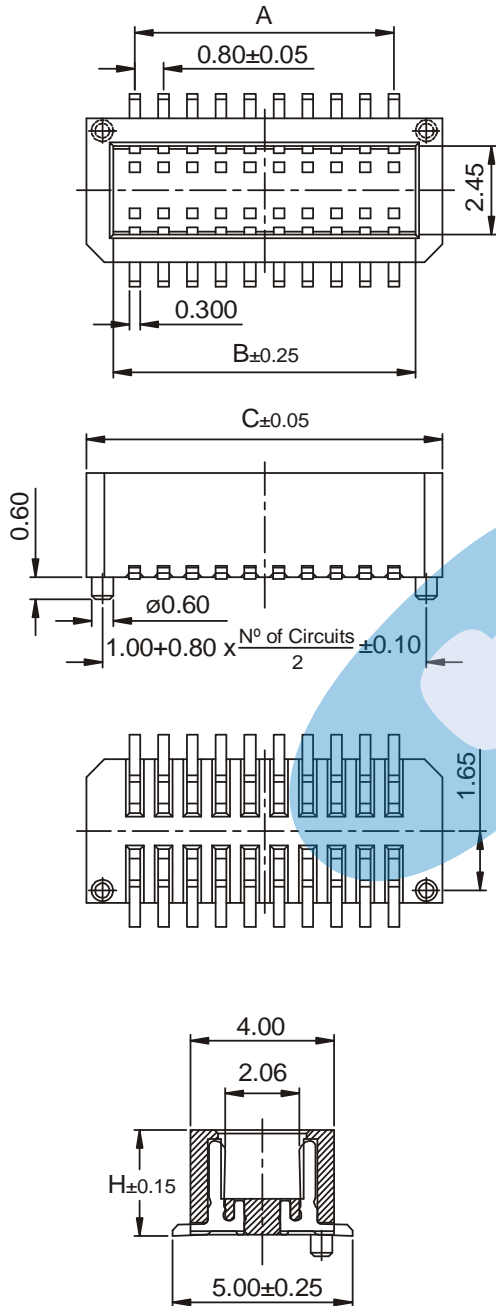

### Ordering and dimensional information:

**0825 - T- XX- L**  
 1            2            3            4

#### 1. Connector Serie

#### 2. (T) Contacts Plating

- T = 3. Gold flash over  $1.27 \mu \text{ Ni}$ .  
**RECOMMENDED FINISH**

#### 3. (XX) Number Of Contacts

- Available in 8 to 50 circuits


#### 4. (L) Connector Length

- L = 1. H = 2.90 mm.
- L = 2. H = 3.40 mm.
- L = 3. H = 3.90 mm.

#### Dimensions

$$A = 0.8 \left( \frac{XX}{2} - 1 \right) \quad B = 0.40 + 0.8 \left( \frac{XX}{2} \right) \quad C = 1.90 + 0.8 \left( \frac{XX}{2} \right)$$

(XX) = Number of circuits

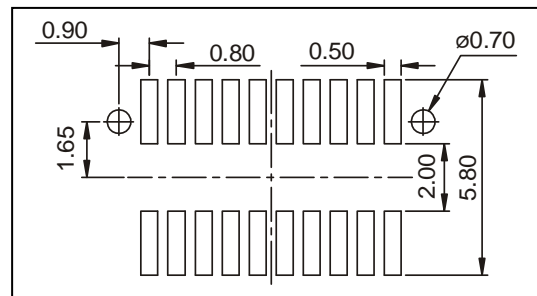

RECOMMENDED HOLE PATTERN

