

# FEMALE STRAIGHT HEADER SMD PCB TO PCB




## 0829 SERIE. 0.80 mm. (0.032"). For PCB to PCB connections.

### Features

- Available in 8 to 50 circuits
- Insulator material: Nylon 6T or LCP UL 94V-0
- Mates with male header 0828 serie
- Phosphor bronze contacts
- Available in different length
- Available With fixation pivots
- Temperature rating: -40° to 105°C
- For other options consult the Sales Office

### Dimensional Information

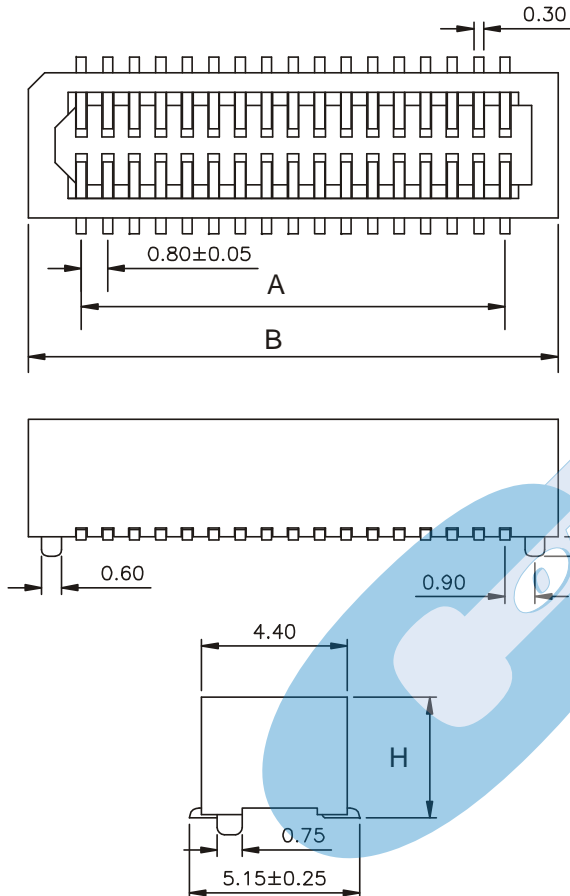

### Ordering and Dimensional Information

**0829 - T- XX- L**  
 1          2          3          4

#### 1. Connector Serie

#### 2. (T) Contacts Plating

- T = 3. Gold flash over 1.27 μ Ni. RECOMMENDED FINISH

#### 3. (XX) Number Of Contacts

- Available in 8 to 50 circuits

#### 4. (L) Connector Length

- L = 1. H = 3.85 mm.
- L = 2. H = 3.15 mm.
- L = 3. H = 5.15 mm.

### DIMENSIONS

$$A = 0.8 \left( \frac{XX}{2} - 1 \right) \quad B = 2.40 + 0.8 \left( \frac{XX}{2} \right) \quad C = 0.8 \left( \frac{XX}{2} \right) + 0.80$$

(XX) = Number of circuits

### RECOMMENDED HOLE PATTERN

