

DUAL ROW STRAIGHT HEADER SMT







1360 SERIES. 1.27 x 1.27mm(0.050 x 0.050"). Optional Fixing Post. SMT

Features

- Available in 10 through 100 circuits
- Mates with 1.27mm(.050") dual row housing and socket
- Insulator Material: Nylon 6T
- 0.40mm square pin in copper alloy
- Pin length and plating options are available
- For other options consult the Sales Office

Dimensional Information

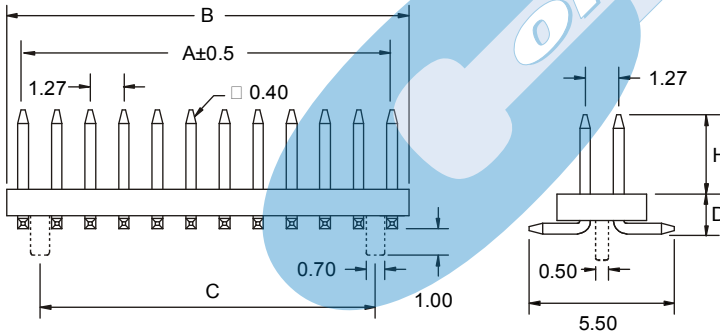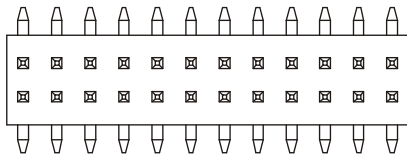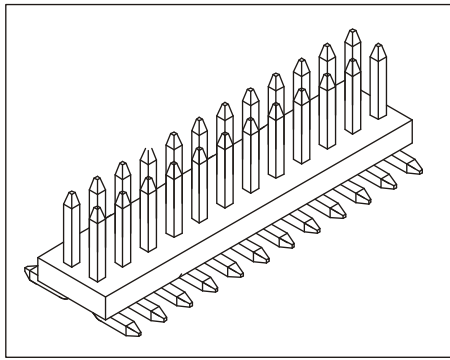

RECOMMENDED PCB LAYOUT

DIMENSIONS:

$$A = 1.27 \left(\frac{XX}{2} \right) \quad B = 1.27 \left(\frac{XX}{2} + 1 \right) \quad C = 1.27 \left(\frac{XX}{2} - 1 \right)$$

XX = Circuit Size

Ordering and Dimensional Information

1360 - T- XX- L- P- S- E
 1 2 3 4 5 6 7

1. Connector Series

2. (T) Plating Options

- T = 2. Tin plated
- T = 3. Gold flash over 50μ" nickel
Recommended Finish
- T = 4. 10μ" gold over 50μ" nickel
- T = 5. 15μ" gold over 50μ" nickel
- T = 6. 30μ" gold over 50μ" nickel

3. (XX) Circuit Size

- Available in 10 to 100 circuits
(For 100 circuits change XX for 00)

4. (L) Insulator Options

- L = 1. D = 1.50 mm.
- L = 2. D = 2.00 mm.
- L = 3. D = 2.50 mm.

5.(P) Locating Peg Options

- P = 1. W/O Locating Peg
- P = 2. WHIT Locating Peg

6.(S) Pin length

- S = 1. Dim. H = 3.00 mm.
- S = 2. Dim. H = 1.50 mm.
- S = 3. Dim. H = 1.90 mm.

6. (E) Packing Options

- E = 1. PAD + TUBE
- E = 2. PAD + REEL

