

# DUAL ROW STRAIGHT HEADER DOUBLE BASE




## 1366 SERIE 1.27 x 1.27 mm. (0.050 x 0.050"). For PCB solder

### Features

- Available in 10 through 100 circuits
- Conecta con cajas y conectores d/ fila paso 1.27 mm.
- Material: Thermoplastico UL 94V-0
- Without polarisation
- 0.40 mm. Square pin in phosphor bronze
- Different plating options are available
- For other options consult the Sales Office

### Dimensional Information:

### Ordering And Dimensional Information:

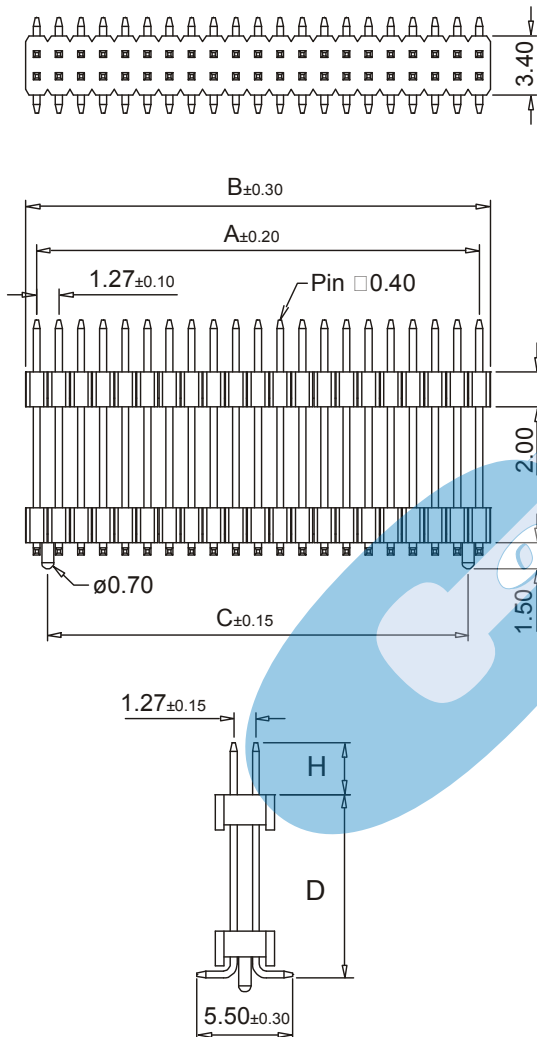

**1366** - **T**- **XX**- **P**- **L**- **E**  
 1            2            3            4            5            6

#### 1. CONECTOR SERIE

#### 2. CONTACT PLATING

- T = 2. Tin-plated.
- T = 3. Gold flash over 1.27  $\mu$  Ni.  
RECOMMENDED FINISH
- T = 5. 0.38  $\mu$  Gold over 1.27  $\mu$  Ni.
- T = 6. 0.75  $\mu$  Gold over 1.27  $\mu$  Ni.

#### 3. (XX) NUMBER OF CONTACT

- Available in 10 through 100 circuits  
 (For 100 circuits replace XX with 00)

#### 4.(P) FIXING POST

- P = 1. Without fixing post
- P = 2. With fixing post

#### 5. CONECTOR HEIGHT

- L = 1. H = 4.80 mm.; D = 3.00
- L = 2. H = 3.00 mm.; D = 6.00
- L = 3. H = 2.80 mm.; D = 8.50

#### 6. (E) CONECTOR PACKAGING

- E = 1. Tube + Plastic cover
- E = 2. Reel + Plastic cover

#### DIMENSIONS:

$$A = 1.27 \left( \frac{XX}{2} - 1 \right) \quad B = 1.27 \left( \frac{XX}{2} \right) \quad C = 1.27 \left( \frac{XX}{2} - 2 \right)$$

XX = Number of circuits

#### RECOMMENDED PCB LAYOUT

