

4.60 mm. FEMALE HEADER SMT



1376 SERIES. 1.27 mm. (0.050"). For PCB Solder


Features

- Available in 2 through 40 circuits
- Insulator material: nylon 6T UL 94V-0
- Mates with 0.40 mm square pin or round pin header of 0.40mm of diameter
- Phosphor bronze terminal with different plating
- Length over PCB 4.60 mm.
- High reliability contact




Dimensional Information:

Ordering and Dimensional Information:

Type 1

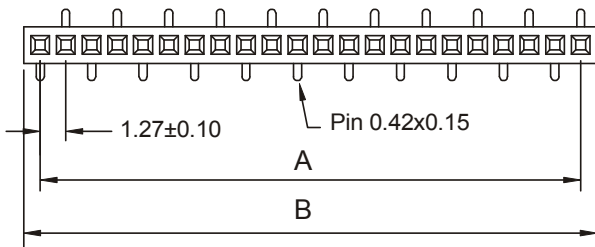

Type 2



1376 - T- XX- P- L- E
 1 2 3 4 5 6

1. Conector Serie

2. Contact Plating

- T = 3. Gold flash over 1.27 μ Ni.
RECOMMENDED FINISH
- T = 5. 0.38 μ Gold over 1.27 μ Ni.
- T = 6. 0.75 μ Gold over 1.27 μ Ni.

3. Number Of Contact

- Available in 2 through 40 circuits

4. Connector Type

- P = 1. Type 1
- P = 2. Type 2

5. Connector Height Over PCB

- L = 1. H = 4.60 mm.

6. Conector Packaging


- E = 3. Film + tube
- E = 4. Film + reel

Connector Dimensions

- DIM. A = 1.27 (XX-1) \pm 0.20
- DIM. B = A + 0.35 \pm 0.25
XX= N° of circuits

RECOMMENDED PCB LAYOUT

Type 1



Type 2

