

DUAL ROW SIDE ENTRY PCB SOCKET SMT





2197 SERIES. 2.00mm(0.079"). For PCB Solder


Features

- Available in 6 through 50 circuits
- Material: Polyester UL 94V-0. Nylon 6T
- Mates with 2.00mm pitch and 0.50mm pin headers
- Different plating options are available
- High quality dual beam phosphor bronze contacts

Dimensional Information

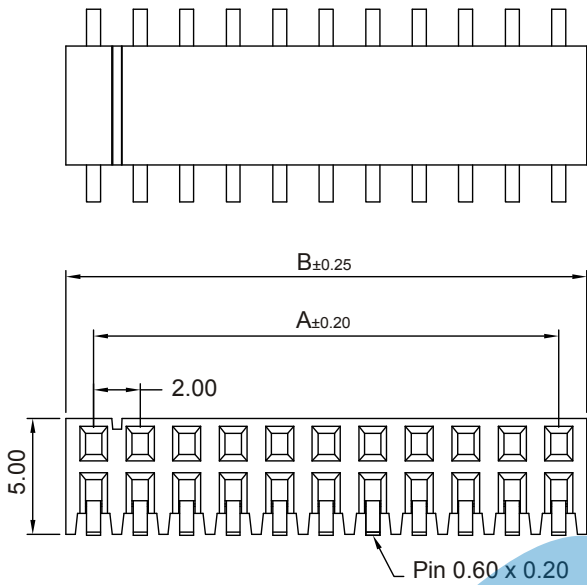

RECOMMENDED HOLE PATTERN



Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
06	2197 - T061	4,00(0,157)	6,40(0,252)
08	2197 - T081	6,00(0,236)	8,40(0,330)
10	2197 - T101	8,00(0,315)	10,40(0,409)
12	2197 - T121	10,00(0,394)	12,40(0,488)
14	2197 - T141	12,00(0,472)	14,40(0,567)
16	2197 - T161	14,00(0,551)	16,40(0,646)
18	2197 - T181	16,00(0,630)	18,40(0,724)
20	2197 - T201	18,00(0,709)	20,40(0,803)
22	2197 - T221	20,00(0,787)	22,40(0,882)
24	2197 - T241	22,00(0,866)	24,40(0,960)
26	2197 - T261	24,00(0,945)	26,40(1,039)
28	2197 - T281	26,00(1,024)	28,40(1,118)
30	2197 - T301	28,00(1,102)	30,40(1,197)
32	2197 - T321	30,00(1,181)	32,40(1,275)
34	2197 - T341	32,00(1,260)	34,40(1,354)
36	2197 - T361	34,00(1,339)	36,40(1,433)
38	2197 - T381	36,00(1,417)	38,40(1,511)
40	2197 - T401	38,00(1,496)	40,40(1,590)
42	2197 - T421	40,00(1,575)	42,40(1,670)
44	2197 - T441	42,00(1,654)	44,40(1,748)
46	2197 - T461	44,00(1,732)	46,40(1,827)
48	2197 - T481	46,00(1,811)	48,40(1,905)
50	2197 - T501	48,00(1,890)	50,40(1,984)

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel
Recommended Finish
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

