

# SINGLE ROW SHROUDED STRAIGHT HEADER




## 2421 SERIES. 2.50mm(0.098"). For PCB Solder

### Features

- Available in 2 through 15 circuits
- Insulator Material: Nylon 6/6 UL94V-0
- 0.64mm(0.025") square pin in copper alloy
- Polarisation slots
- Mates with 2420 series socket
- With standoffs minimise flux wicking
- Low profile (6mm)
- Pre-formed pins in solder area

### Dimensional Information

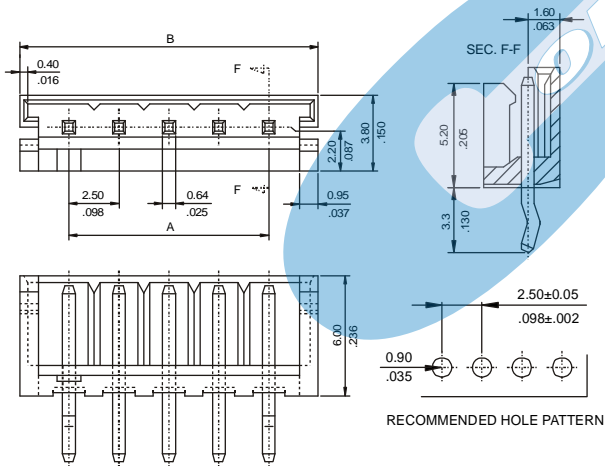

### Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
02	<b>2421-2021</b>	2,50(0,098)	7,40(0,291)
03	<b>2421-2031</b>	5,00(0,197)	9,90(0,390)
04	<b>2421-2041</b>	7,50(0,295)	12,40(0,488)
05	<b>2421-2051</b>	10,00(0,394)	14,90(0,587)
06	<b>2421-2061</b>	12,50(0,492)	17,40(0,685)
07	<b>2421-2071</b>	15,00(0,591)	19,90(0,783)
08	<b>2421-2081</b>	17,50(0,689)	22,40(0,882)
09	<b>2421-2091</b>	20,00(0,787)	24,90(0,980)
10	<b>2421-2101</b>	22,50(0,886)	27,40(1,079)
11	<b>2421-2111</b>	25,00(0,984)	29,90(1,177)
12	<b>2421-2121</b>	27,50(1,083)	32,40(1,276)
13	<b>2421-2131</b>	30,00(1,181)	34,90(1,374)
14	<b>2421-2141</b>	32,50(1,280)	37,40(1,472)
15	<b>2421-2151</b>	35,00(1,378)	39,90(1,571)