

# SINGLE ROW SHROUDED R/ ANGLE HEADER




## 2522 SERIES. 2.50mm(0.098"). For PCB Solder

### Features

- Available in 2 through 20 circuits
- Mates with 2520 series socket
- Insulator Material: Nylon 6/6 UL 94V-0
- 0.64mm(0.025") square pin in brass tinned
- With polarisation slots
- With standoffs minimise flux wicking
- Low profile

### Dimensional Information

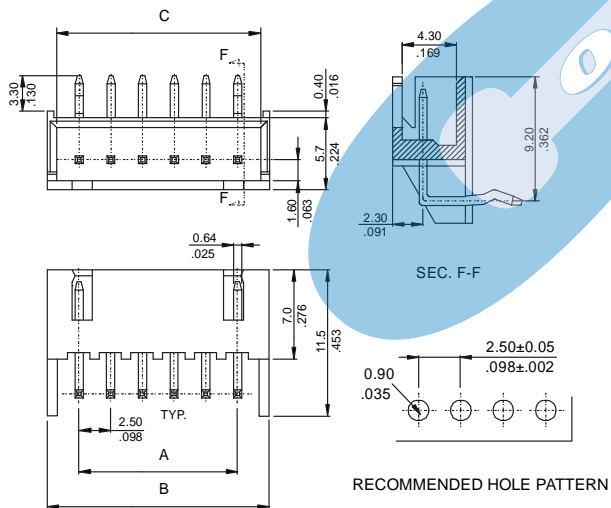

### Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions		
		A	B	C
02	<b>2522-2021</b>	2,50(0,098)	7,50(0,295)	6,10(0,240)
03	<b>2522-2031</b>	5,00(0,197)	10,00(0,394)	8,60(0,339)
04	<b>2522-2041</b>	7,50(0,295)	12,50(0,492)	11,10(0,437)
05	<b>2522-2051</b>	10,00(0,394)	15,00(0,591)	13,60(0,535)
06	<b>2522-2061</b>	12,50(0,492)	17,50(0,689)	16,10(0,634)
07	<b>2522-2071</b>	15,00(0,591)	20,00(0,787)	18,60(0,732)
08	<b>2522-2081</b>	17,50(0,689)	22,50(0,886)	21,10(0,831)
09	<b>2522-2091</b>	20,00(0,787)	25,00(0,984)	23,60(0,929)
10	<b>2522-2101</b>	22,50(0,886)	27,50(1,083)	26,10(1,028)
11	<b>2522-2111</b>	25,00(0,984)	30,00(1,181)	28,60(1,126)
12	<b>2522-2121</b>	27,50(1,083)	32,50(1,280)	31,10(1,224)
13	<b>2522-2131</b>	30,00(1,181)	35,00(1,378)	33,60(1,323)
14	<b>2522-2141</b>	32,50(1,280)	37,50(1,476)	36,10(1,421)
15	<b>2522-2151</b>	35,00(1,378)	40,00(1,575)	38,60(1,520)
16	<b>2522-2161</b>	37,50(1,476)	42,50(1,673)	41,10(1,618)
17	<b>2522-2171</b>	40,00(1,575)	45,00(1,772)	43,60(1,717)
18	<b>2522-2181</b>	42,50(1,673)	47,50(1,870)	46,10(1,815)
19	<b>2522-2191</b>	45,00(1,772)	50,00(1,969)	48,60(1,913)
20	<b>2522-2201</b>	47,50(1,870)	52,50(2,067)	51,10(2,012)