

BOTTOM ENTRY SINGLE ROW PCB SOCKET




2527 SERIES. 2.54mm(0.100"). For PCB Solder

Features


- Available in 2 through 20 circuits
- Mates with 2.54mm single row headers
- Insulation Material: Nylon 6/6 UL 94V-0
- Contact material: Tin plated solder tail terminal
- Accepts 0.64mm(0.025") square pin
- With P.C. Board standoff

Dimensional Information

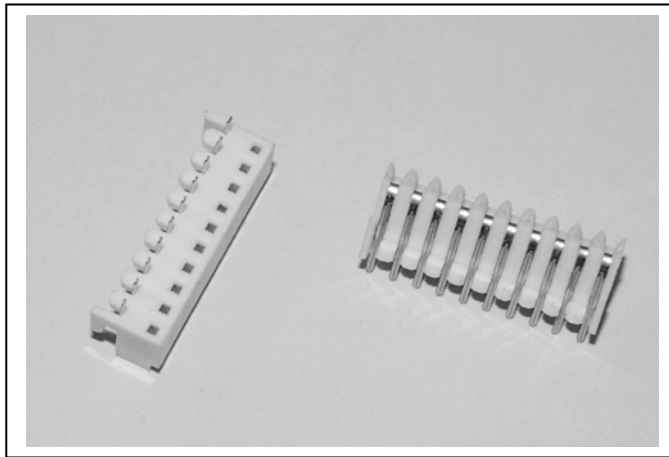

Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
02	2527-2021	2.54(0,100)	5.10 (0.201)
03	2527-2031	5.08(0,200)	7.60 (0.299)
04	2527-2041	7.62(0,300)	10.20 (0.402)
05	2527-2051	10.16(0,400)	12.70 (0.500)
06	2527-2061	12.70(0,500)	15.20 (0.598)
07	2527-2071	15.24(0,600)	17.80 (0.701)
08	2527-2081	17.78(0,700)	20.30 (0.799)
09	2527-2091	20.32(0,800)	22.90 (0.902)
10	2527-2101	22.86(0,900)	25.40 (1.000)
11	2527-2111	25.40(1,000)	27.90 (1.098)
12	2527-2121	27.94(1,100)	30.50 (1.201)
13	2527-2131	30.48(1,200)	33.00 (1.299)
14	2527-2141	33.02(1,300)	35.60 (1.402)
15	2527-2151	35.56(1,400)	38.10 (1.500)
16	2527-2161	38.10(1,500)	40.60 (1.598)
17	2527-2171	40.64(1,600)	43.20 (1.701)
18	2527-2181	43.18(1,700)	45.70 (1.799)
19	2527-2191	45.72(1,800)	48.30 (1.902)
20	2527-2201	48.26(1,900)	50.80 (2.000)

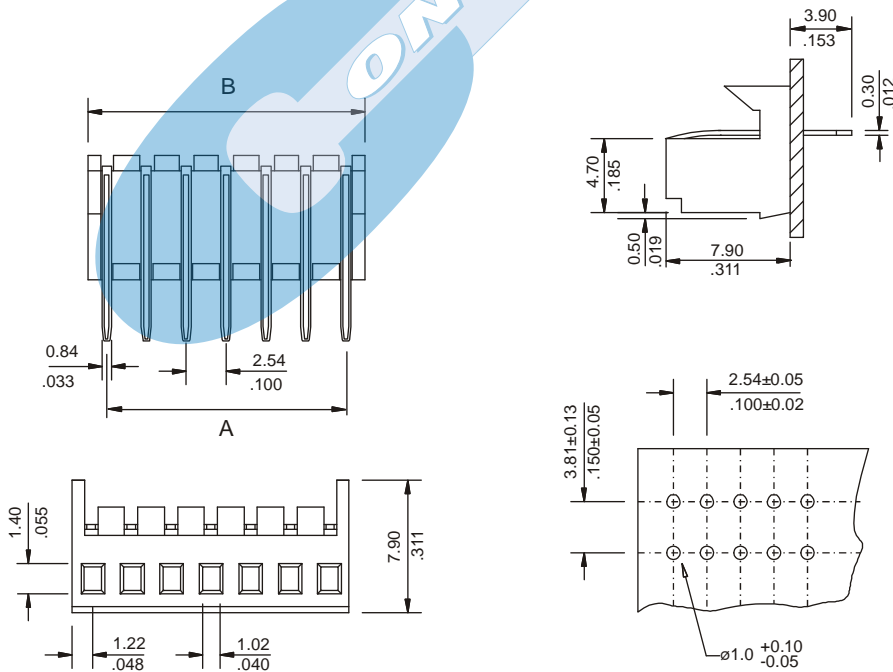

RECOMMENDED HOLE PATTERN