

# SINGLE ROW SIDE ENTRY HEADER



## 2532 SERIES. 2.54 mm (0.100") pitch.

### General Features


- Available in 2 through 20 circuits
- Mates with 2.54 mm crimp housing 2544 and 2630 series
- 0,64 mm. square pin tin plated
- Polarized with locking ramp

### Materials



- Insulator: Nylon 66 UL 94 V-2
- Contact: Tin plated brass
- Operating temperature: -25°C to +105°C
- RoHS compliant

### Dimension Information

#### Type A

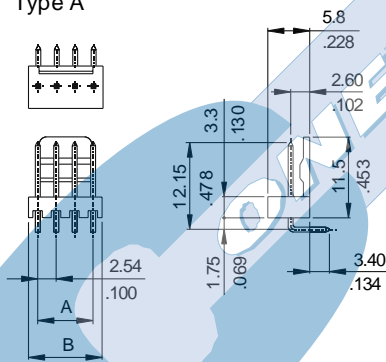

#### Type B

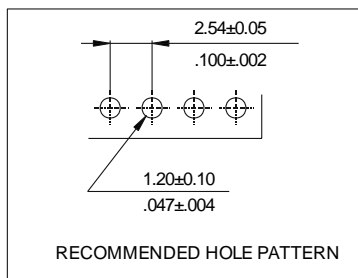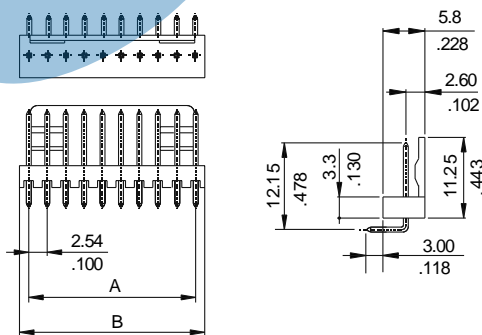


### Electrical Features

- Voltage rating: < 250V
- Current rating: < 3 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 1500 V AC/minute
- Insulation resistance: >1000 MΩ

### Mechanical Features

- Pin retention force to insulator: > 1.00 Kgf
- Durability: 25 cycles

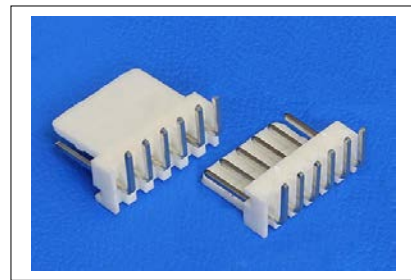

### Ordering Information:

**2532 - T- XX- C**  
1 2 3 4

#### 1. Connector Series

#### 2. (T) Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over nickel  
Recommended Finish
- T = 5. 15μ" gold over nickel
- T = 6. 30μ" gold over nickel

#### 3. (XX) Number of circuits

- Available in 2 through 20 circuits

#### 3. (C) Connector Type

- C = 1. Type A
- C = 2. Type B

Dimensions: (In mm.)

A = 2.54 x (XX\*-1)  
B = 2.54 x (XX\*)

\* XX (Number of circuits)