

SINGLE IN LINE ADAPTER STRIP






8342 SERIES. 2.54mm(0.100"). For PCB Solder

Features


- Available in 2 through 40 circuits
- Insulation Material: PPS UL 94V-0
- Contact Material: Gold or tin plated brass per QQ-B-626
- Machined pin: Different pin length options available
- High reliability turned terminal with multiple finger contact
- For other options consult the Sales Office

Dimensional Information:

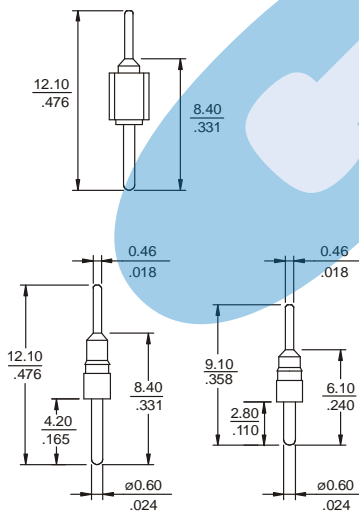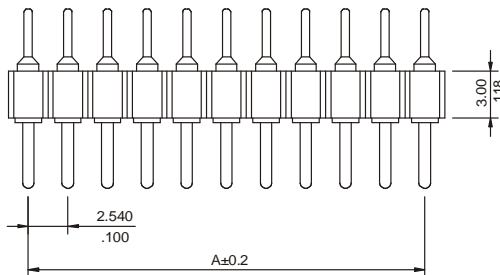

Tipo: A

Tipo: B



MECANIZADO RECOMENDADO

Ordering and Dimensional Information

| Circuit Size | Part Number | Dimension | |
|--------------|-------------|--------------|---------------|
| | | A | B |
| 02 | 8342-T02X | 2,54(0,100) | 4,98(0,196) |
| 03 | 8342-T03X | 5,08(0,200) | 7,52(0,296) |
| 04 | 8342-T04X | 7,62(0,300) | 10,06(0,396) |
| 05 | 8342-T05X | 10,16(0,400) | 12,60(0,496) |
| 06 | 8342-T06X | 12,70(0,500) | 15,14(0,596) |
| 07 | 8342-T07X | 15,24(0,600) | 17,68(0,696) |
| 08 | 8342-T08X | 17,78(0,700) | 20,22(0,796) |
| 09 | 8342-T09X | 20,32(0,800) | 22,76(0,896) |
| 10 | 8342-T10X | 22,86(0,900) | 25,30(0,996) |
| 11 | 8342-T11X | 25,40(1,000) | 27,84(1,096) |
| 12 | 8342-T12X | 27,94(1,100) | 30,38(1,196) |
| 13 | 8342-T13X | 30,48(1,200) | 32,92(1,296) |
| 14 | 8342-T14X | 33,02(1,300) | 35,46(1,396) |
| 15 | 8342-T15X | 35,56(1,400) | 38,00(1,496) |
| 16 | 8342-T16X | 38,10(1,500) | 40,54(1,596) |
| 17 | 8342-T17X | 40,64(1,600) | 43,08(1,696) |
| 18 | 8342-T18X | 43,18(1,700) | 45,62(1,796) |
| 19 | 8342-T19X | 45,72(1,800) | 48,16(1,896) |
| 20 | 8342-T20X | 48,26(1,900) | 50,70(1,996) |
| 21 | 8342-T21X | 50,80(2,000) | 53,24(2,096) |
| 22 | 8342-T22X | 53,34(2,100) | 55,78(2,196) |
| 23 | 8342-T23X | 55,88(2,200) | 58,32(2,296) |
| 24 | 8342-T24X | 58,42(2,300) | 60,86(2,396) |
| 25 | 8342-T25X | 60,96(2,400) | 63,40(2,496) |
| 26 | 8342-T26X | 63,50(2,500) | 65,94(2,596) |
| 27 | 8342-T27X | 66,04(2,600) | 68,48(2,696) |
| 28 | 8342-T28X | 68,58(2,700) | 71,02(2,796) |
| 29 | 8342-T29X | 71,12(2,800) | 73,56(2,896) |
| 30 | 8342-T30X | 73,66(2,900) | 76,10(2,996) |
| 31 | 8342-T31X | 76,20(3,000) | 78,64(3,096) |
| 32 | 8342-T32X | 78,74(3,100) | 81,18(3,196) |
| 33 | 8342-T33X | 81,28(3,200) | 83,72(3,296) |
| 34 | 8342-T34X | 83,82(3,300) | 86,26(3,396) |
| 35 | 8342-T35X | 86,36(3,400) | 88,80(3,496) |
| 36 | 8342-T36X | 88,90(3,500) | 91,34(3,596) |
| 37 | 8342-T37X | 91,44(3,600) | 93,88(3,696) |
| 38 | 8342-T38X | 93,98(3,700) | 96,42(3,796) |
| 39 | 8342-T39X | 96,52(3,800) | 98,96(3,896) |
| 40 | 8342-T40X | 99,06(3,900) | 101,50(3,996) |

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel
Recommended Finish
- T = 4. 10µ" gold over 50µ" nickel
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

X = Pin Length

- X = 1. Type A
- X = 2. Type B