

DIN 41612 EUROCARD CONNECTOR



2219 SERIES. Female IDC B Type


Features

- Available in 64 circuits
- Contact Material: Cooper alloy
- Insulator: PBT (UL 94V-0)
- For mount in 9127 cable series
- Contact Resistance: 15 milliohms.
- Operating Temperature: -55°C to 125°C
- Consult options with the sales Office

Dimensional Information

Ordering and Dimensional Information

Circuit Size	Type	Configuration	Part Number		Dimensions			
					A	B	C	D
32	B/2	a + b	2219 -T321	Pin n° 1 (1a)	55.00 (2.165)	38.10 (1.500)	50.00 (1.968)	44.40 (1.748)
32	B/2	a + b	2219 -T322	Pin n° 1 (1b)	55.00 (2.165)	38.10 (1.500)	50.00 (1.968)	44.40 (1.748)
64	B	a + b	2219 - T642	Pin n° 1 (1b)	95.00 (3.740)	78.74 (3.100)	90.00 (3.543)	85.00 (3.346)

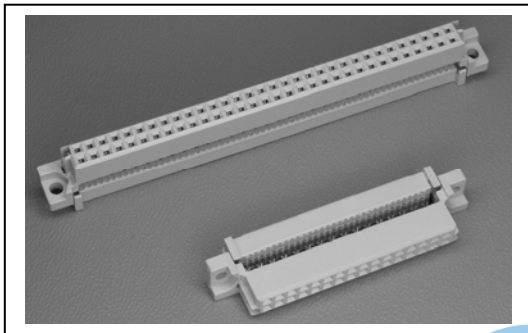

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel.
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

