

FEMALE HEADER FOR FLAT CABLE




5435 SERIES. 2.54 x 2.54 mm. (0.100 x 0.100"). Insulator displacement

Features




- Available in 6, 8, 10, 12, 14, 16, 20, 22, 24, 26, 30, 34, 40, 44, 50, 56, 60, 62 and 64 circuits
- Phosphor bronze Terminal with different plating options
- Insulator material: Glass filled polyester UL 94V-0
- Accepts 9127 serie 1.27 mm flat ribbon cable
- Strain Relief optional: 5435-00XX or 5437-00XX
- Optional: polarising key series 5440-0001

Dimensional information:

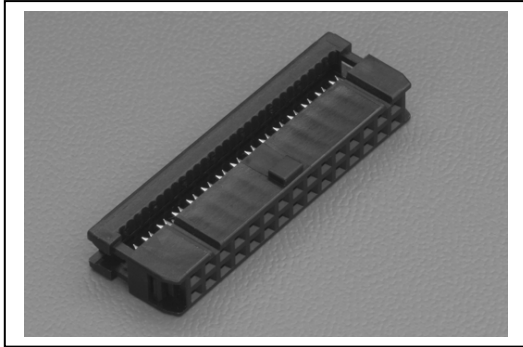


Ordering and dimensional information:

Circuit Size	Part Number	Dimensions		
		A	B	C
06	5435-T060	12.32 (0.485)	5.08(0,200)	1.85 (0.073)
08	5435-T080	14.86 (0.585)	7.62(0,300)	1.85 (0.073)
10	5435-T100	17.40 (0.685)	10,16(0,400)	3.50 (0.138)
12	5435-T120	19.94 (0.785)	12,70(0,500)	3.50 (0.138)
14	5435-T140	22.48 (0.885)	15,24(0,600)	3.50 (0.138)
16	5435-T160	25.02 (0.985)	17,78(0,700)	3.50 (0.138)
20	5435-T200	30.10 (1.185)	22,86(0,900)	3.50 (0.138)
24	5435-T240	35.18 (1.385)	27,94(1,100)	3.50 (0.138)
26	5435-T260	37.72 (1.485)	30,48(1,200)	3.50 (0.138)
30	5435-T300	42.80 (1.685)	35,56(1,400)	3.50 (0.138)
34	5435-T340	47.88 (1.885)	40,64(1,600)	3.50 (0.138)
36	5435-T360	50.42 (1.985)	43,18(1,600)	3.50 (0.138)
40	5435-T400	55.50 (2.185)	48,26(1,900)	3.50 (0.138)
44	5435-T440	60.58 (2.385)	53,34(2,100)	3.50 (0.138)
50	5435-T500	68.20 (2.685)	60,96(2,400)	3.50 (0.138)
56	5435-T560	75.82 (2.985)	68,58(2,700)	3.50 (0.138)
60	5435-T600	80.90 (3.185)	73,66(2,900)	3.50 (0.138)
62	5435-T620	83.44 (3.285)	76,20(3,000)	3.50 (0.138)
64	5435-T640	85.98 (3.385)	78,74(3,100)	3.50 (0.138)

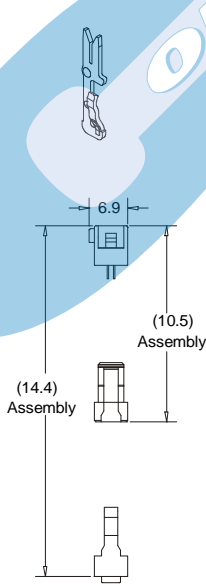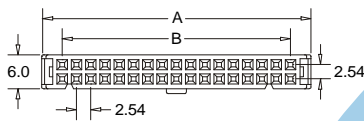

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel.
Recommended Finish
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

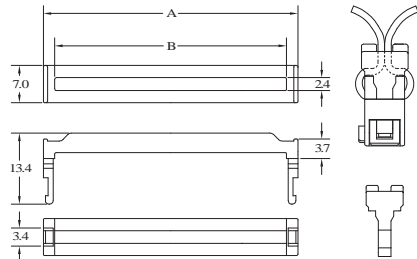

Strain Relief
5435-00XX
(XX= n° circuits)

Strain Relief
5437-00XX
(XX= n° circuits)