SCREWLESS PCB TERM. BLOCK CAGE CLAMP

BC01362*, BC01374*, BC0138* SERIES. 3.50 mm (0.138"). PCB Type

General Features

- Available in 2 through 24 circuits
- High reliability structure of wires connections and professional applications
- Side, 45° and top wires entry
- Meet IEC 60947-7-4 and UL 1059 requirements and are approved by UL and VDE

Materials

- Insulator: PA66 UL 94 V-0
- Contact: Electrolytic copper tin plated
- Spring: High-strength steel alloys zinc plated
- Operating temperature: -40°C to +105°C
- RoHS compliant


Dimension Information


Electrical Features

- Voltage rating: 150V UL / 130V IEC
- Rated current: 10 A UL (6A IEC BC01362 Series)
 17.5 A IEC (2A IEC BC01362 Series)
- Contact resistance: < 20 mΩ
- Rated surge voltage: 1600V UL / 2500 V IEC
- Insulation resistance: >500 MΩ

Mechanical features

- Wire strip length: 9.00 mm. (8.00 mm. BC01362 series)
- Conductor cross-section: AWG 28-16
- Durability: 25 cycles

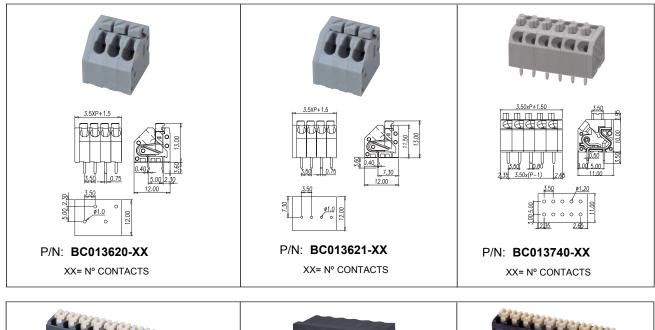

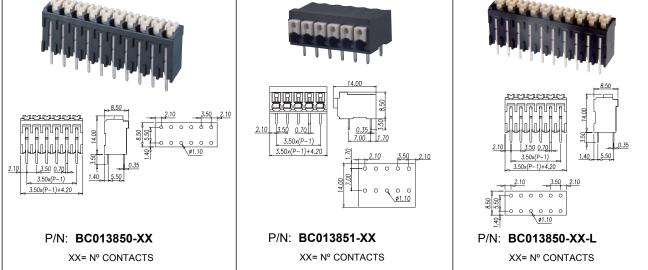

SCREWLESS PCB TERM. BLOCK CAGE CLAMP



BC01362*, BC01374*, BC0138* SERIES. 3.50 mm (0.138"). PCB Type

