PCB TERM. BLOCK HIGH CURRENT (25A UL)

BCEHK508*, BCE2HK508*, BCE2HK508*, BCEEHK508*. 5.08 mm. (0.200").

General Features

- Available in 2 through 24 circuits
- High reliability structure of wires connections and
 Professional applications
- Side, top and 45° wires entry
- Meet IEC 60998 and UL 1059 requirements and are approved by UL and VDE
- Single level and bi-level structure

Materials

- Insulator: PA66 UL 94 V-0
- Contact: Electrolytic copper tin plated
- Screw: High-strength steel alloys M 2.5 zinc plated
- Wire cage: High-strength steel alloys zinc plated
- Operating temperature: -40°C to +105°C
- RoHS compliant


Dimension Information

Electrical Features

- Voltage rating: 300 V UL / 250 V IEC
- Rated current: 25 A UL / 24 A IEC
- Contact resistance: < 20 mΩ
- Rated surge voltage: 2200 V UL / 4000 V IEC
- Insulation resistance: >500 MΩ

Mechanical features

- Wire strip length: 6.00 to 7.00 mm.
- Conductor cross-section: AWG 24-12
- Torque (N-m): 0.45
- Durability: 25 cycles

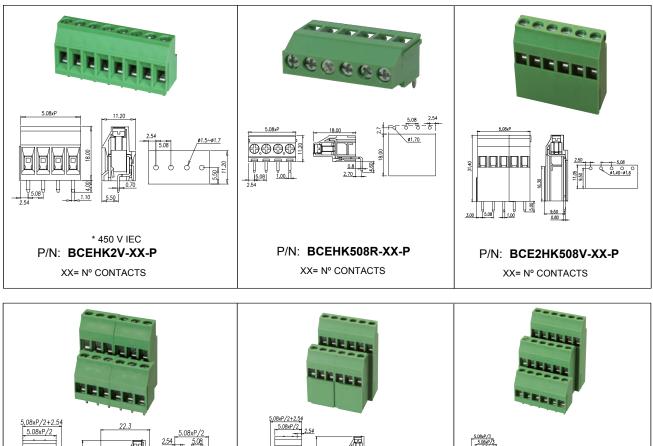

nnr

P/N: BCEHK508V2L-XX-P

XX= Nº CONTACTS

P/N: BCEHK508V3L-XX-P

XX= Nº CONTACTS

2.54

AAAAA'

508 100

P/N: BCEEHK508V-XX-P

XX= Nº CONTACTS