

# MALE STRAIGHT HEADER SMT PCB TO PCB




## 0824 SERIES. 0.80mm. (0.032"). For PCB To PCB Connections.

### Features

- Available in 8 to 50 circuits
- Insulator material: Nylon 9T UL 94V-0
- Mates with female header 0825 serie
- Phosphor bronze contacts
- Available With fixation pivots
- Temperature rating: -40° to 105°C
- For other options consult the Sales Office

### Dimensional information:

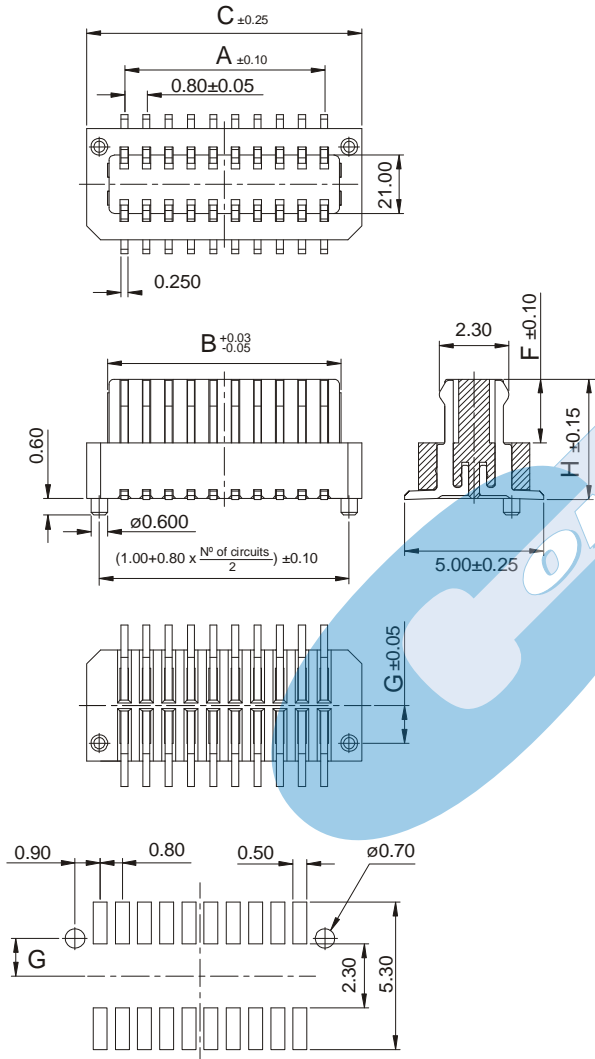

### Ordering and dimensional information:

**0824 - T- XX- L**  
 1            2            3            4

#### 1. Connector Serie

#### 2. (T) Contacts Plating

- T = 3. Gold flash over 1.27 µ Ni.  
**RECOMMENDED FINISH**

#### 3. (Xx) Number Of Contacts

- Available in 8 to 50 circuits

#### 4. (L) Connector Length

	H	F	G
● L = 1.	2.80	1.80	1.350
● L = 2.	3.30	1.80	1.350
● L = 3.	3.80	1.80	1.350
● L = 4.	4.30	2.30	1.350
● L = 5.	4.80	2.30	1.350
● L = 6.	5.30	2.30	1.350
● L = 7.	5.30	2.30	1.250

### Dimensions

$$A = 0.8 \left( \frac{XX}{2} - 1 \right) \quad B = 0.4 + 0.8 \left( \frac{XX}{2} \right) \quad C = 1.90 + 0.8 \left( \frac{XX}{2} \right)$$

(XX) = Number of circuits

