

MALE STRAIGHT POLARISED SMT




1304 SERIES. 1.27 x 1.27 mm. (0.050 x 0.050"). For PCB solder

Features

- Available in 10 through 120 circuits
- Mates with female header 1301 and 1302 serie
- Completely polarised and protected
- Insulator material: Polyester / Nylon 6-T UL 94V-0
- With or without fixation PCB
- Height over PCB 6.10
- 0.40 mm square pin
- Available in different length
- For other options consult the Sales Office

Dimensional information:

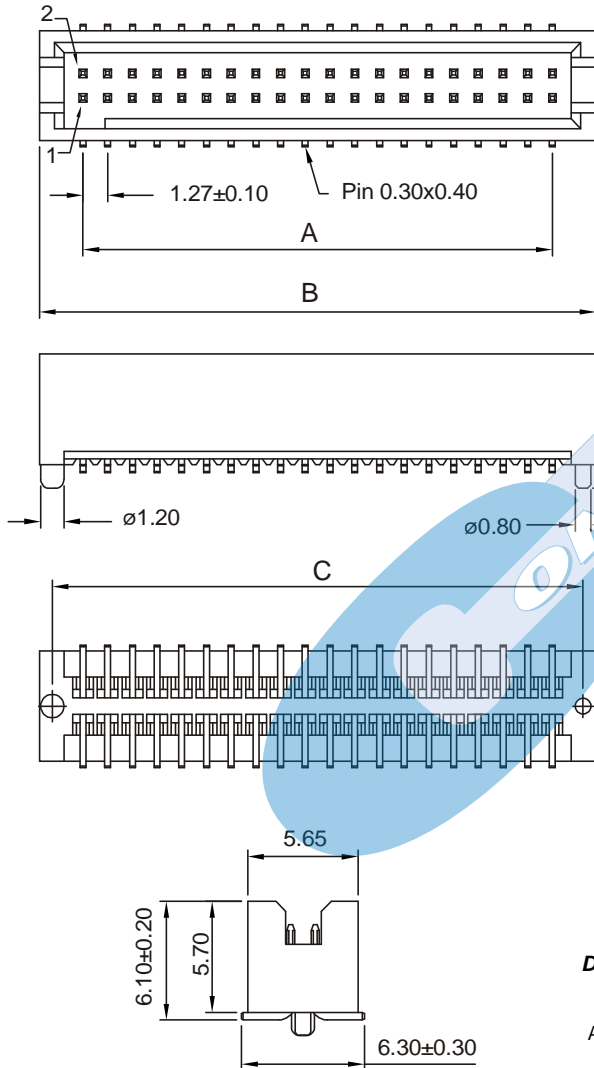

Ordering and Dimensional Information

1304 - T- XX- P- E

1 2 3 4 5

1. CONECTOR SERIE

2. CONTACT PLATING

- T = 2. Tin-plated.
- T = 3. Gold flash over 1.27 µ Ni.
RECOMMENDED FINISH
- T = 4. 0.25 µ Gold over 1.27 µ Ni.
- T = 5. 0.38 µ Gold over 1.27 µ Ni.
- T = 6. 0.75 µ Gold over 1.27 µ Ni.

3. NUMBER OF CONTACT

- Available in 6 through 120 circuits

4. FIXING POST

- P = 1. Without fixing post
- P = 2. With fixing post

5. CONECTOR PACKAGING

- E = 1. Tube + Plastic Pad
- E = 2. Reel + Plastic Pad
- E = 3. Tube + Film
- E = 4. Reel + Film
- E = 5. Tube + Metallic Pad
- E = 6. Reel + Metallic Pad

DIMENSIONS:

$$A = 1.27 \left(\frac{XX}{2} - 1 \right) \quad B = 3.20 + 1.27 \left(\frac{XX}{2} \right) \quad C = 1.88 + 1.27 \left(\frac{XX}{2} \right)$$

XX = Number of circuits

RECOMMENDED PCB LAYOUT

