

DUAL ROW STRAIGHT HEADER DOUBLE BASE




1366 SERIE 1.27 x 1.27 mm. (0.050 x 0.050"). For PCB solder

Features

- Available in 10 through 100 circuits
- Conecta con cajas y conectores d/ fila paso 1.27 mm.
- Material: Thermoplastico UL 94V-0
- Without polarisation
- 0.40 mm. Square pin in phosphor bronze
- Different plating options are available
- For other options consult the Sales Office

Dimensional Information:

Ordering And Dimensional Information:

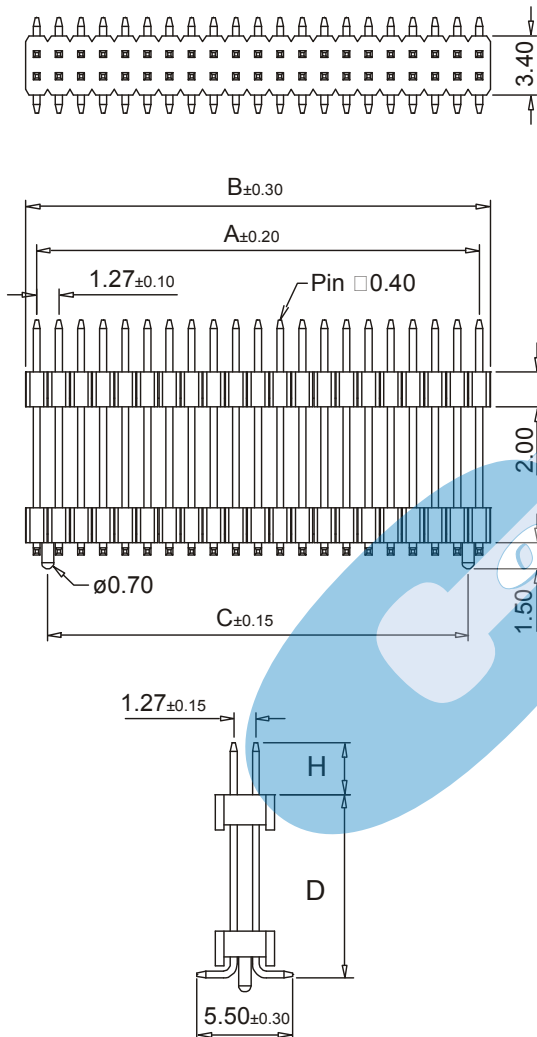

1366 - **T**- **XX**- **P**- **L**- **E**
 1 2 3 4 5 6

1. CONECTOR SERIE

2. CONTACT PLATING

- T = 2. Tin-plated.
- T = 3. Gold flash over 1.27 µ Ni.
RECOMMENDED FINISH
- T = 5. 0.38 µ Gold over 1.27 µ Ni.
- T = 6. 0.75 µ Gold over 1.27 µ Ni.

3. (XX) NUMBER OF CONTACT

- Available in 10 through 100 circuits
(For 100 circuits replace XX with 00)

4.(P) FIXING POST

- P = 1. Without fixing post
- P = 2. With fixing post

5. CONECTOR HEIGHT

- L = 1. H = 4.80 mm.; D = 3.00
- L = 2. H = 3.00 mm.; D = 6.00
- L = 3. H = 2.80 mm.; D = 8.50

6. (E) CONECTOR PACKAGING

- E = 1. Tube + Plastic cover
- E = 2. Reel + Plastic cover

DIMENSIONS:

$$A = 1.27 \left(\frac{XX}{2} - 1 \right) \quad B = 1.27 \left(\frac{XX}{2} \right) \quad C = 1.27 \left(\frac{XX}{2} - 2 \right)$$

XX = Number of circuits

RECOMMENDED PCB LAYOUT

