

# DUAL ROW R/ ANGLE HEADER D/ BASE




## 1368 SERIES. 1.27 x 1.27mm(0.050 x 0.050"). For PCB Solder

### Features

- Available in 8 through 66 circuits
- Insulator Material: Thermoplastic UL 94V-0
- Mates with 1.27mm(.050") dual row housing and socket
- Different plating options are available
- Easy breakaway to desired circuit size
- 0.40mm square pin in copper alloy
- Different pin lengths are available
- For other options consult the Sales Office

### Dimensional Information

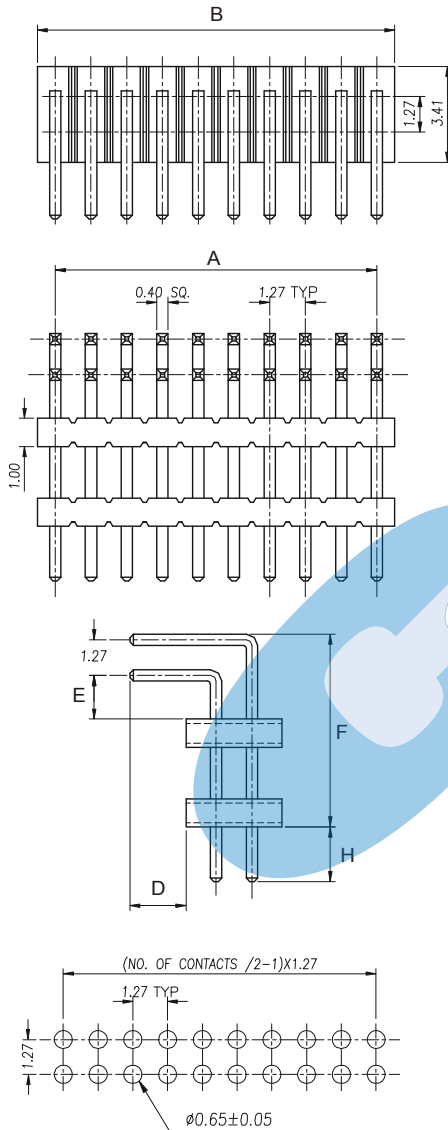

RECOMMENDED HOLE PATTERN

### Ordering and Dimensional Information

CIRCUITOS	CÓDIGO	DIMENSIONES	
		A	B
08	1368-T08C	3,81 (0,150)	5,08(0,200)
10	1368-T10C	5,08(0,200)	6,35(0,250)
12	1368-T12C	6,35(0,250)	7,62(0,300)
14	1368-T14C	7,62(0,300)	8,89(0,350)
16	1368-T16C	8,89(0,350)	10,16(0,400)
18	1368-T18C	10,16(0,400)	11,43(0,450)
20	1368-T20C	11,43(0,450)	12,70(0,500)
22	1368-T22C	12,70(0,500)	13,97(0,550)
24	1368-T24C	13,97(0,550)	15,24(0,600)
26	1368-T26C	15,24(0,600)	16,51(0,650)
28	1368-T28C	16,51(0,650)	17,78(0,700)
30	1368-T30C	17,78(0,700)	19,05(0,750)
32	1368-T32C	19,05(0,750)	20,32(0,800)
34	1368-T34C	20,32(0,800)	21,59(0,850)
36	1368-T36C	21,59(0,850)	22,86(0,900)
38	1368-T38C	22,86(0,900)	24,13(0,950)
40	1368-T40C	24,13(0,950)	25,40(1,000)
42	1368-T42C	25,40(1,000)	26,67(1,050)
44	1368-T44C	26,67(1,050)	27,94(1,100)
46	1368-T46C	27,94(1,100)	29,21(1,150)
48	1368-T48C	29,21(1,150)	30,48(1,200)
50	1368-T50C	30,48(1,200)	31,75(1,250)
52	1368-T52C	31,75(1,250)	33,02(1,300)
54	1368-T54C	33,02(1,300)	34,29(1,350)
56	1368-T56C	34,29(1,350)	35,56(1,400)
58	1368-T58C	35,56(1,400)	36,83(1,450)
60	1368-T60C	36,83(1,450)	38,10(1,500)
62	1368-T62C	38,10(1,500)	39,37(1,550)
64	1368-T64C	39,37(1,550)	40,64(1,600)
66	1368-T66C	40,64(1,600)	41,91(1,650)

### T = Contact Plating

- T = 3. Gold flash over 50µ" nickel  
Recommended Finish
- T = 13. Selective gold flash over 50µ" nickel
- T = 15. 15µ" selective gold over 50µ" nickel
- T = 16. 30µ" selective gold over 50µ" nickel
- **NOTE:** The dimensions H, D, F and E are according to customer specifications
- Standard Length:

C = 1. H: 2.20mm D: 2.00mm E: 1.00mm F: 6.63mm

For other options consult the Sales Office