

# BOTTOM ENTRY SINGLE ROW PCB SOCKET




## 2527 SERIES. 2.54mm(0.100"). For PCB Solder

### Features


- Available in 2 through 20 circuits
- Mates with 2.54mm single row headers
- Insulation Material: Nylon 6/6 UL 94V-0
- Contact material: Tin plated solder tail terminal
- Accepts 0.64mm(0.025") square pin
- With P.C. Board standoff

### Dimensional Information

### Ordering and Dimensional Information

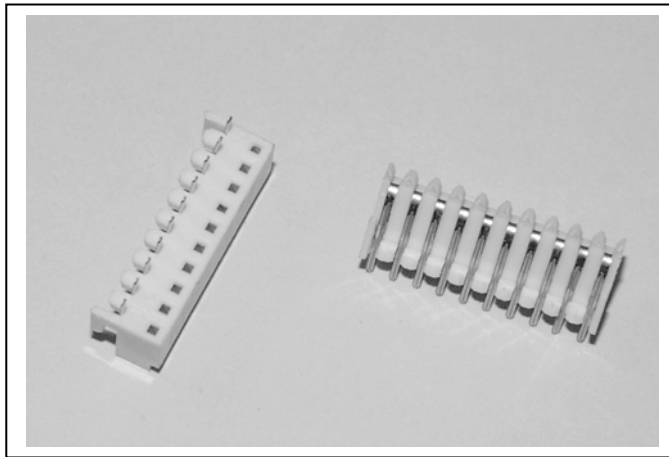

Circuit Size	Part Number	Dimensions	
		A	B
02	2527-2021	2.54(0,100)	5,10 (0.201)
03	2527-2031	5,08(0,200)	7,60 (0.299)
04	2527-2041	7,62(0,300)	10,20 (0.402)
05	2527-2051	10,16(0,400)	12,70 (0.500)
06	2527-2061	12,70(0,500)	15,20 (0.598)
07	2527-2071	15,24(0,600)	17,80 (0.701)
08	2527-2081	17,78(0,700)	20,30 (0.799)
09	2527-2091	20,32(0,800)	22,90 (0.902)
10	2527-2101	22,86(0,900)	25,40 (1.000)
11	2527-2111	25,40(1,000)	27,90 (1.098)
12	2527-2121	27,94(1,100)	30,50 (1.201)
13	2527-2131	30,48(1,200)	33,00 (1.299)
14	2527-2141	33,02(1,300)	35,60 (1.402)
15	2527-2151	35,56(1,400)	38,10 (1.500)
16	2527-2161	38,10(1,500)	40,60 (1.598)
17	2527-2171	40,64(1,600)	43,20 (1.701)
18	2527-2181	43,18(1,700)	45,70 (1.799)
19	2527-2191	45,72(1,800)	48,30 (1.902)
20	2527-2201	48,26(1,900)	50,80 (2.000)

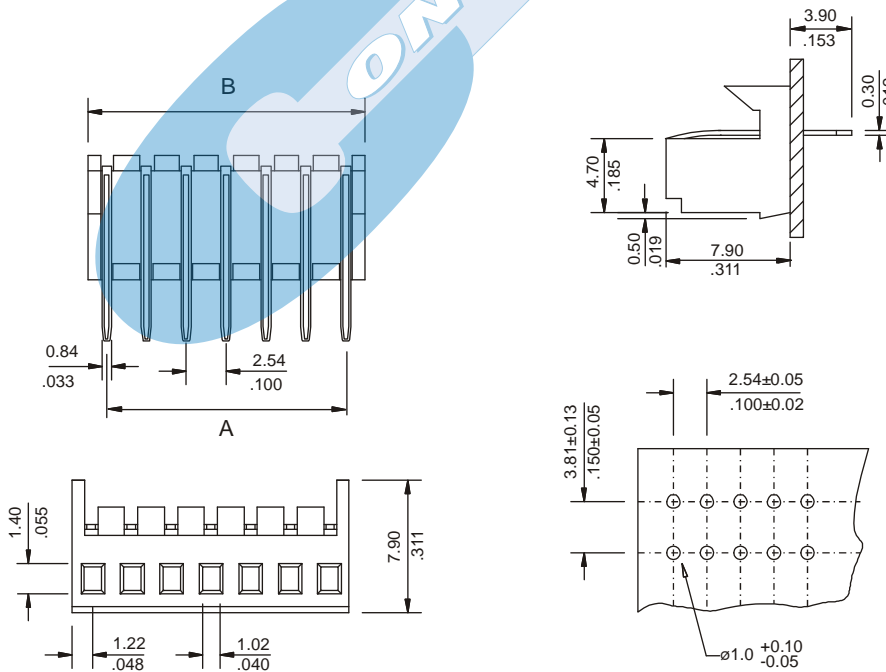

RECOMMENDED HOLE PATTERN