

RIGHT ANGLE HEADER WITH BACK WALL




2532 SERIES. 2.54mm(0.100"). For PCB Solder.

Features

- Available in 2 through 20 circuits
- Insulator Material: Nylon 6/6 UL 94V-2
- Contact Material: 0.64mm(.025") square pin in Brass
- Mates with 2544-A and 2544-B series socket
- Polarised with locking ramp

Dimensional Information:

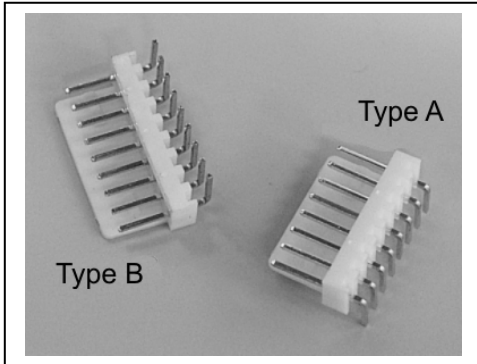

Dimensional and Ordering Information:

Circuit Size	Part Number		Dimensions	
	Type A	Type B	A	B
02	2532- T021	2532- T022	2,54(0,100)	5,08(0,200)
03	2532- T031	2532- T032	5,08(0,200)	7,62(0,300)
04	2532- T041	2532- T042	7,62(0,300)	10,16(0,400)
05	2532- T051	2532- T052	10,16(0,400)	12,70(0,500)
06	2532- T061	2532- T062	12,70(0,500)	15,24(0,600)
07	2532- T071	2532- T072	15,24(0,600)	17,78(0,700)
08	2532- T081	2532- T082	17,78(0,700)	20,32(0,800)
09	2532- T091	2532- T092	20,32(0,800)	22,86(0,900)
10	2532- T101	2532- T102	22,86(0,900)	25,40(1,000)
11	2532- T111	2532- T112	25,40(1,000)	27,94(1,100)
12	2532- T121	2532- T122	27,94(1,100)	30,48(1,200)
13	2532- T131	2532- T132	30,48(1,200)	33,02(1,300)
14	2532- T141	2532- T142	33,02(1,300)	35,56(1,400)
15	2532- T151	2532- T152	35,56(1,400)	38,10(1,500)
16	2532- T161	2532- T162	38,10(1,500)	40,64(1,600)
17	2532- T171	2532- T172	40,64(1,600)	43,18(1,700)
18	2532- T181	2532- T182	43,18(1,700)	45,72(1,800)
19	2532- T191	2532- T192	45,72(1,800)	48,26(1,900)
20	2532- T201	2532- T202	48,26(1,900)	50,80(2,000)

T = Plating Options

- T = 2. Tin Plated.
- T = 3. Gold flash over 30-50µ" nickel overall
- T = 5. 15µ" gold over 30-50µ" nickel overall
- T = 6. 30µ" gold over 30-50µ" nickel overall

