

SINGLE ROW DUAL INSULATOR HEADER




2548 SERIES. 2.54mm(0.100"). For PCB Solder


Features

- Available in 2 through 40 circuits
- Mates with 2.54mm(.100") single row sockets
- Material: Glass filled polyester UL 94V-0 Colour: Black
- 0.64mm(.025") square pin in Brass
- Different pin length and plating options are available
- Stackable row by row and end to end
- Easy breakaway to desired circuit size
- For other options consult the Sales Office

Dimensional Information

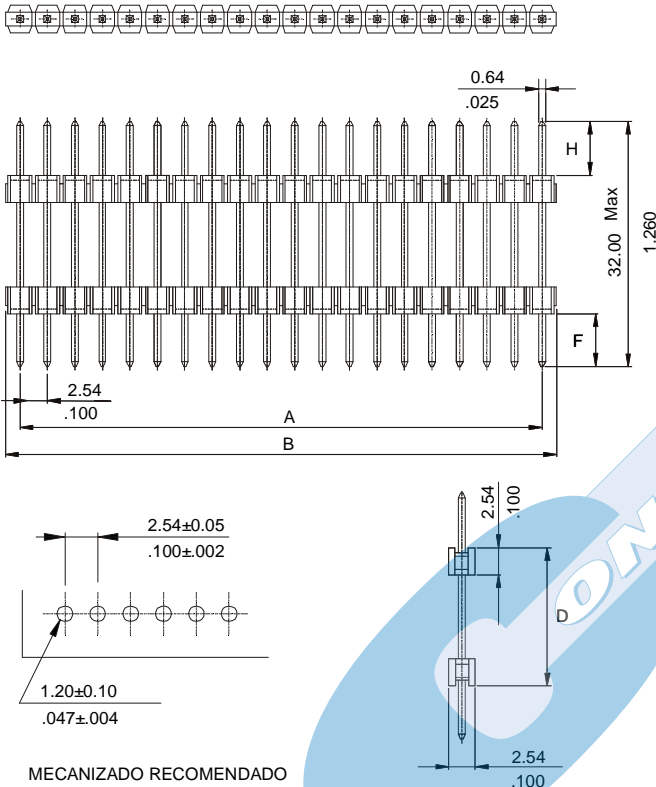

MECANIZADO RECOMENDADO

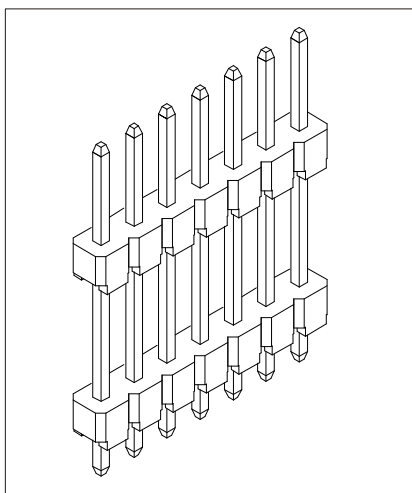

Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions	
		A	B
02	2548-T02C	2,54(0,100)	5,08(0,200)
03	2548-T03C	5,08(0,200)	7,62(0,300)
04	2548-T04C	7,62(0,300)	10,16(0,400)
05	2548-T05C	10,16(0,400)	12,70(0,500)
06	2548-T06C	12,70(0,500)	15,24(0,600)
07	2548-T07C	15,24(0,600)	17,78(0,700)
08	2548-T08C	17,78(0,700)	20,32(0,800)
09	2548-T09C	20,32(0,800)	22,86(0,900)
10	2548-T10C	22,86(0,900)	25,40(1,000)
11	2548-T11C	25,40(1,000)	27,94(1,100)
12	2548-T12C	27,94(1,100)	30,48(1,200)
13	2548-T13C	30,48(1,200)	33,02(1,300)
14	2548-T14C	33,02(1,300)	35,56(1,400)
15	2548-T15C	35,56(1,400)	38,10(1,500)
16	2548-T16C	38,10(1,500)	40,64(1,600)
17	2548-T17C	40,64(1,600)	43,18(1,700)
18	2548-T18C	43,18(1,700)	45,72(1,800)
19	2548-T19C	45,72(1,800)	48,26(1,900)
20	2548-T20C	48,26(1,900)	50,80(2,000)
21	2548-T21C	50,80(2,000)	53,34(2,100)
22	2548-T22C	53,34(2,100)	55,88(2,200)
23	2548-T23C	55,88(2,200)	58,42(2,300)
24	2548-T24C	58,42(2,300)	60,96(2,400)
25	2548-T25C	60,96(2,400)	63,50(2,500)
26	2548-T26C	63,50(2,500)	66,04(2,600)
27	2548-T27C	66,04(2,600)	68,58(2,700)
28	2548-T28C	68,58(2,700)	71,12(2,800)
29	2548-T29C	71,12(2,800)	73,66(2,900)
30	2548-T30C	73,66(2,900)	76,20(3,000)
31	2548-T31C	76,20(3,000)	78,74(3,100)
32	2548-T32C	78,74(3,100)	81,28(3,200)
33	2548-T33C	81,28(3,200)	83,82(3,300)
34	2548-T34C	83,82(3,300)	86,36(3,400)
35	2548-T35C	86,36(3,400)	88,90(3,500)
36	2548-T36C	88,90(3,500)	91,44(3,600)
37	2548-T37C	91,44(3,600)	93,98(3,700)
38	2548-T38C	93,98(3,700)	96,52(3,800)
39	2548-T39C	96,52(3,800)	99,06(3,900)
40	2548-T40C	99,06(3,900)	101,60(4,000)

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50µ" nickel
Finish Recommended
- T = 5. 15µ" gold over 50µ" nickel
- T = 6. 30µ" gold over 50µ" nickel

C = Pin Length


- Available different options
(Check enclose table)

SINGLE ROW DUAL INSULATOR HEADER



2548 SERIES. 2.54mm(0.100"). For PCB Solder

Dimensional Information

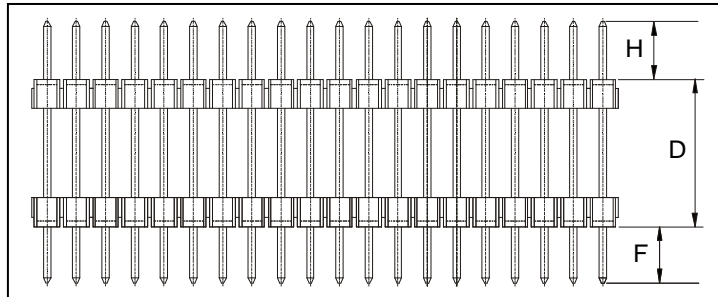

C = Pin Length

● C = 1. H = 8.90mm.	D = 11.08mm.	F = 3.05mm
● C = 2. H = 6.00mm.	D = 7.00mm.	F = 3.00mm
● C = 3. H = 6.00mm.	D = 5.08mm.	F = 3.00mm
● C = 4. H = 8.13mm.	D = 14.42mm.	F = 2.90mm
● C = 5. H = 7.00mm.	D = 28.00mm.	F = 3.00mm
● C = 6. H = 5.90mm.	D = 11.20mm.	F = 3.40mm
● C = 7. H = 7.00mm.	D = 24.00mm.	F = 3.00mm
● C = 9. H = 8.00mm.	D = 14.50mm.	F = 3.00mm
● C = 15. H = 7.00mm.	D = 14.00mm.	F = 3.00mm
● C = 16. H = 2.50mm.	D = 6.00mm.	F = 2.50mm
● C = 17. H = 3.00mm.	D = 13.10mm.	F = 3.00mm
● C = 18. H = 3.20mm.	D = 18.50mm.	F = 3.20mm
● C = 19. H = 6.00mm.	D = 13.00mm.	F = 3.00mm
● C = 20. H = 3.00 mm.	D = 30.00 mm.	F = 3.00 mm.
● C = 22. H = 9.10 mm.	D = 5.50 mm.	F = 9.00 mm.
● C = 23. H = 3.00 mm.	D = 6.00 mm.	F = 6.00 mm.
● C = 24. H = 4.40 mm.	D = 5.10 mm.	F = 3.30 mm.
● C = 25. H = 3.20 mm.	D = 8.00 mm.	F = 3.20 mm.
● C = 26. H = 3.00 mm.	D = 31.50 mm.	F = 3.00 mm.
● C = 27. H = 6.00 mm.	D = 14.10 mm.	F = 3.00 mm.
● C = 28. H = 6.00 mm.	D = 10.00 mm.	F = 3.00 mm.
● C = 29. H = 3.00 mm.	D = 10.40 mm.	F = 3.00 mm.