

S/ ROW BREAKAWAY STRAIGHT HEADER






2556 SERIES. 2.54mm(0.100") Single Row Breakaway Header


Features

- Available in 2 through 40 circuits
- Mates with 2.54mm(.100") single row sockets
- Material: Glass filled polyester UL 94V-0. Colour Black
- 0.64mm(.025") square pin in copper alloy
- Different pin length and plating options are available
- Stackable row by row and end to end
- Easy breakaway to desired circuit size
- For other options consult the Sales Office

Dimensional Information:

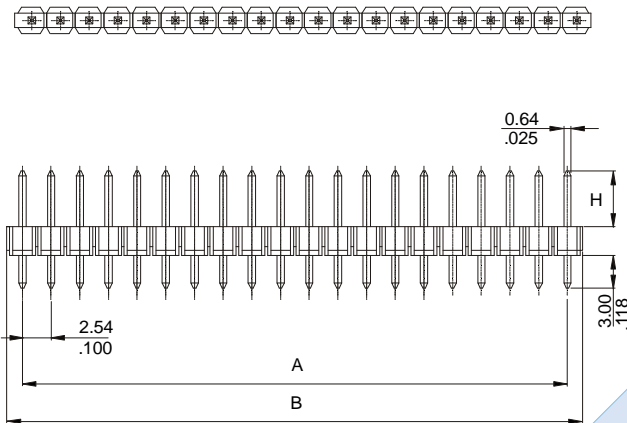

MECANIZADO RECOMENDADO

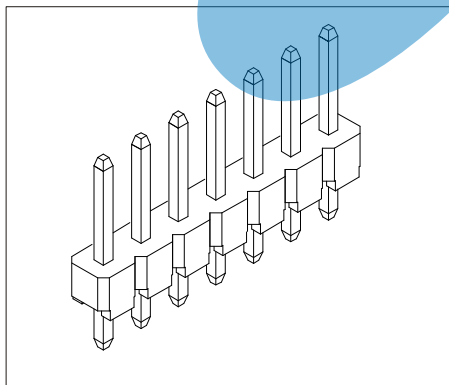

Ordering and Dimensional Information

| Dimension | Part Number | Dimension | |
|-----------|------------------|--------------|---------------|
| | | A | B |
| 02 | 2556-T02C | 2,54(0,100) | 5,08(0,200) |
| 03 | 2556-T03C | 5,08(0,200) | 7,62(0,300) |
| 04 | 2556-T04C | 7,62(0,300) | 10,16(0,400) |
| 05 | 2556-T05C | 10,16(0,400) | 12,70(0,500) |
| 06 | 2556-T06C | 12,70(0,500) | 15,24(0,600) |
| 07 | 2556-T07C | 15,24(0,600) | 17,78(0,700) |
| 08 | 2556-T08C | 17,78(0,700) | 20,32(0,800) |
| 09 | 2556-T09C | 20,32(0,800) | 22,86(0,900) |
| 10 | 2556-T10C | 22,86(0,900) | 25,40(1,000) |
| 11 | 2556-T11C | 25,40(1,000) | 27,94(1,100) |
| 12 | 2556-T12C | 27,94(1,100) | 30,48(1,200) |
| 13 | 2556-T13C | 30,48(1,200) | 33,02(1,300) |
| 14 | 2556-T14C | 33,02(1,300) | 35,56(1,400) |
| 15 | 2556-T15C | 35,56(1,400) | 38,10(1,500) |
| 16 | 2556-T16C | 38,10(1,500) | 40,64(1,600) |
| 17 | 2556-T17C | 40,64(1,600) | 43,18(1,700) |
| 18 | 2556-T18C | 43,18(1,700) | 45,72(1,800) |
| 19 | 2556-T19C | 45,72(1,800) | 48,26(1,900) |
| 20 | 2556-T20C | 48,26(1,900) | 50,80(2,000) |
| 21 | 2556-T21C | 50,80(2,000) | 53,34(2,100) |
| 22 | 2556-T22C | 53,34(2,100) | 55,88(2,200) |
| 23 | 2556-T23C | 55,88(2,200) | 58,42(2,300) |
| 24 | 2556-T24C | 58,42(2,300) | 60,96(2,400) |
| 25 | 2556-T25C | 60,96(2,400) | 63,50(2,500) |
| 26 | 2556-T26C | 63,50(2,500) | 66,04(2,600) |
| 27 | 2556-T27C | 66,04(2,600) | 68,58(2,700) |
| 28 | 2556-T28C | 68,58(2,700) | 71,12(2,800) |
| 29 | 2556-T29C | 71,12(2,800) | 73,66(2,900) |
| 30 | 2556-T30C | 73,66(2,900) | 76,20(3,000) |
| 31 | 2556-T31C | 76,20(3,000) | 78,74(3,100) |
| 32 | 2556-T32C | 78,74(3,100) | 81,28(3,200) |
| 33 | 2556-T33C | 81,28(3,200) | 83,82(3,300) |
| 34 | 2556-T34C | 83,82(3,300) | 86,36(3,400) |
| 35 | 2556-T35C | 86,36(3,400) | 88,90(3,500) |
| 36 | 2556-T36C | 88,90(3,500) | 91,44(3,600) |
| 37 | 2556-T37C | 91,44(3,600) | 93,98(3,700) |
| 38 | 2556-T38C | 93,98(3,700) | 96,52(3,800) |
| 39 | 2556-T39C | 96,52(3,800) | 99,06(3,900) |
| 40 | 2556-T40C | 99,06(3,900) | 101,60(4,000) |


T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 30-50µ" nickel overall
Recommended Finish
- T = 5. 15µ" gold over 30-50µ" nickel overall
- T = 6. 30µ" gold over 30-50µ" nickel overall
- T = 13. Selective gold flash over 30-50µ" nickel overall
- T = 15. 15µ" selective gold over 30-50µ" nickel overall
- T = 16. 30µ" selective gold over 30-50µ" nickel overall

S/ ROW BREAKAWAY STRAIGHT HEADER



2556 SERIES. 2.54mm(0.100") Single Row Breakaway Header



C = Pin Length

- C = 0. Dimension H = 2.90 mm.
- C = 1. Dimension H = 6.00 mm.
Recommended finish
- C = 2. Dimension H = 6.85 mm.
- C = 3. Dimension H = 8.30 mm.
- C = 4. Dimension H = 11.80 mm.
- C = 5. Dimension H = 15.00 mm.
- C = 6. Dimension H = 19.00 mm.
- C = 7. Dimension H = 9.900 mm.
- C = 8. Dimension H = 16.56 mm.
- C = 9. Dimension H = 7.29 mm.
- C = 10. Dimension H = 6.30 mm.
- C = 11. Dimension H = 7.26 mm.
- C = 12. Dimension H = 8.86 mm.
- C = 13. Dimension H = 5.86 mm.
- C = 14. Dimension H = 14.70 mm.
- C = 15. Dimension H = 11.00 mm.
- C = 16. Dimension H = 26.00 mm.
- C = 17. Dimension H = 19.96 mm.
- C = 18. Dimension H = 10.60 mm.
- C = 19. Dimension H = 12.00 mm.
- C = 20. Dimension H = 7.00 mm.
- C = 21. Dimension H = 4.60 mm.
- C = 22. Dimension H = 3.00 mm.
- C = 23. Dimension H = 4.50 mm.