

DUAL ROW BREAKAWAY STRAIGHT HEADER





2558 SERIES. 2.54 x 2.54mm(0.100" X 0.100"). Dual Row Breakaway Header


Features

- Available in 4 through 80 circuits
- Mates with 2.54mm(.100") dual row sockets
- Material: Glass filled polyester UL 94V-0. Colour: Black
- 0.64mm(.025") square pin in copper alloy
- Different pin length and plating options are available
- Stackable row by row and end to end
- Easy breakaway to desired circuit size
- For other options consult the Sales Office

Dimensional Information

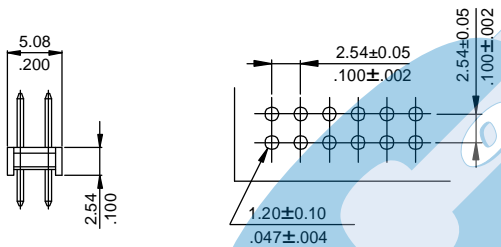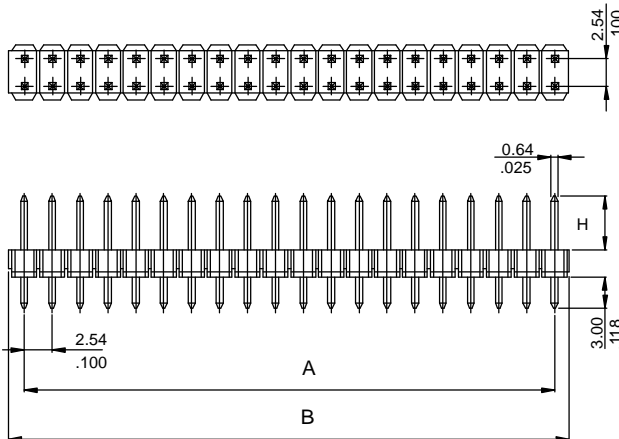

RECOMMENDED HOLE PATTERN

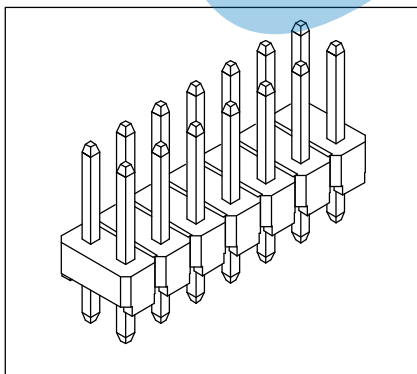

Ordering and Dimensional Information

Circuit Size	Part Number	Dimension	
		A	B
04	2558-104C	2,54(0,100)	5,08(0,200)
06	2558-106C	5,08(0,200)	7,62(0,300)
08	2558-108C	7,62(0,300)	10,16(0,400)
10	2558-110C	10,16(0,400)	12,70(0,500)
12	2558-112C	12,70(0,500)	15,24(0,600)
14	2558-114C	15,24(0,600)	17,78(0,700)
16	2558-116C	17,78(0,700)	20,32(0,800)
18	2558-118C	20,32(0,800)	22,86(0,900)
20	2558-120C	22,86(0,900)	25,40(1,000)
22	2558-122C	25,40(1,000)	27,94(1,100)
24	2558-124C	27,94(1,100)	30,48(1,200)
26	2558-126C	30,48(1,200)	33,02(1,300)
28	2558-128C	33,02(1,300)	35,56(1,400)
30	2558-130C	35,56(1,400)	38,10(1,500)
32	2558-132C	38,10(1,500)	40,64(1,600)
34	2558-134C	40,64(1,600)	43,18(1,700)
36	2558-136C	43,18(1,700)	45,72(1,800)
38	2558-138C	45,72(1,800)	48,26(1,900)
40	2558-140C	48,26(1,900)	50,80(2,000)
42	2558-142C	50,80(2,000)	53,34(2,100)
44	2558-144C	53,34(2,100)	55,88(2,200)
46	2558-146C	55,88(2,200)	58,42(2,300)
48	2558-148C	58,42(2,300)	60,96(2,400)
50	2558-150C	60,96(2,400)	63,50(2,500)
52	2558-152C	63,50(2,500)	66,04(2,600)
54	2558-154C	66,04(2,600)	68,58(2,700)
56	2558-156C	68,58(2,700)	71,12(2,800)
58	2558-158C	71,12(2,800)	73,66(2,900)
60	2558-160C	73,66(2,900)	76,20(3,000)
62	2558-162C	76,20(3,000)	78,74(3,100)
64	2558-164C	78,74(3,100)	81,28(3,200)
66	2558-166C	81,28(3,200)	83,82(3,300)
68	2558-168C	83,82(3,300)	86,36(3,400)
70	2558-170C	86,36(3,400)	88,90(3,500)
72	2558-172C	88,90(3,500)	91,44(3,600)
74	2558-174C	91,44(3,600)	93,98(3,700)
76	2558-176C	93,98(3,700)	96,52(3,800)
78	2558-178C	96,52(3,800)	99,06(3,900)
80	2558-180C	99,06(3,900)	101,60(4,000)


T = Plating Options

- T = 2. Tin plated.
- T = 3. Gold flash over 30-50µ" nickel overall
Recommended Finish
- T = 5. 15µ" gold over 30-50µ" nickel overall
- T = 6. 30µ" gold over 30-50µ" nickel overall

DUAL ROW BREAKAWAY STRAIGHT HEADER



2558 SERIES. 2.54 x 2.54mm(0.100" X 0.100"). Dual Row Breakaway Header



C = Pin Length

- C = 0. Dim. H = 5.00mm
- C = 1. Dim. H = 5.82mm
- C = 2. Dim. H = 6.85mm
- C = 3. Dim. H = 8.13mm
- C = 4. Dim. H = 8.86mm
- C = 5. Dim. H = 15.00mm
- C = 6. Dim. H = 19.00mm
- C = 7. Dim. H = 10.00mm
- C = 8. Dim. H = 12.00mm
- C = 9. Dim. H = 7.26mm
- C = 10. Dim. H = 6.26mm
- C = 14. Dim. H = 2.50mm
- C = 17. Dim. H = 4.00mm
- Other Lengths consult the Sales Office