

DUAL ROW RIGHT ANGLE HEADER SMT




2579 SERIES. 2.54 mm. (0.100"). For PCB solder

Features

- Available in 4 through 80 circuits
- Mates with dual row 2.54 mm
- Material : Polyester UL 94V-0
- 0.64 mm square pin
- Available with different plating
- Optional: fixation pivots to PCB
- Available different pin lengths (Standar 6 mm.)

Dimensional information

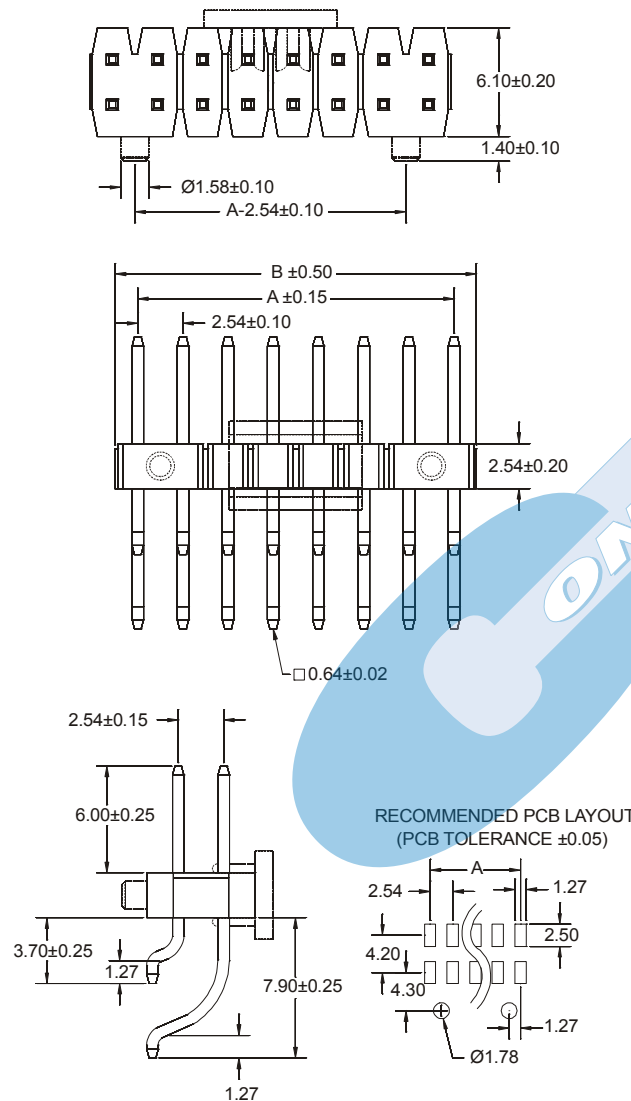

C = Connector Dimension

- C = 1. H = 6 mm.

E = Connector Packaging

- E = 1. Tube + Plastic cover
- E = 2. Reel + Plastic cover

Ordering and dimensional information

Circuit Size	Part Number	Dimensions	
		A	B
04	2579-T04PCE	2,54(0,100)	5,08(0,200)
06	2579-T06PCE	5,08(0,200)	7,62(0,300)
08	2579-T08PCE	7,62(0,300)	10,16(0,400)
10	2579-T10PCE	10,16(0,400)	12,70(0,500)
12	2579-T12PCE	12,70(0,500)	15,24(0,600)
14	2579-T14PCE	15,24(0,600)	17,78(0,700)
16	2579-T16PCE	17,78(0,700)	20,32(0,800)
18	2579-T18PCE	20,32(0,800)	22,86(0,900)
20	2579-T20PCE	22,86(0,900)	25,40(1,000)
22	2579-T22PCE	25,40(1,000)	27,94(1,100)
24	2579-T24PCE	27,94(1,100)	30,48(1,200)
26	2579-T26PCE	30,48(1,200)	33,02(1,300)
28	2579-T28PCE	33,02(1,300)	35,56(1,400)
30	2579-T30PCE	35,56(1,400)	38,10(1,500)
32	2579-T32PCE	38,10(1,500)	40,64(1,600)
34	2579-T34PCE	40,64(1,600)	43,18(1,700)
36	2579-T36PCE	43,18(1,700)	45,72(1,800)
38	2579-T38PCE	45,72(1,800)	48,26(1,900)
40	2579-T40PCE	48,26(1,900)	50,80(2,000)
42	2579-T42PCE	50,80(2,000)	53,34(2,100)
44	2579-T44PCE	53,34(2,100)	55,88(2,200)
46	2579-T46PCE	55,88(2,200)	58,42(2,300)
48	2579-T48PCE	58,42(2,300)	60,96(2,400)
50	2579-T50PCE	60,96(2,400)	63,50(2,500)
52	2579-T52PCE	63,50(2,500)	66,04(2,600)
54	2579-T54PCE	66,04(2,600)	68,58(2,700)
56	2579-T56PCE	68,58(2,700)	71,12(2,800)
58	2579-T58PCE	71,12(2,800)	73,66(2,900)
60	2579-T60PCE	73,66(2,900)	76,20(3,000)
62	2579-T62PCE	76,20(3,000)	78,74(3,100)
64	2579-T64PCE	78,74(3,100)	81,28(3,200)
66	2579-T66PCE	81,28(3,200)	83,82(3,300)
68	2579-T68PCE	83,82(3,300)	86,36(3,400)
70	2579-T70PCE	86,36(3,400)	88,90(3,500)
72	2579-T72PCE	88,90(3,500)	91,44(3,600)
74	2579-T74PCE	91,44(3,600)	93,98(3,700)
76	2579-T76PCE	93,98(3,700)	96,52(3,800)
78	2579-T78PCE	96,52(3,800)	99,06(3,900)
80	2579-T80PCE	99,06(3,900)	101,60(4,000)

T = Contact Plating

- T = 2. Tin-plated.
- T = 3. Gold flash over 1.27 μ Ni.
- T = 5. 0.38 μ Gold over 1.27 μ Ni.
- T = 6. 0.75 μ Gold over 1.27 μ Ni.
- T = 13. Selective Gold flash over 1.27 μ Ni.
- T = 15. 0.38 μ Selective Gold flash over 1.27 μ Ni.
- T = 17. 0.76 μ Selective Gold flash over 1.27 μ Ni.

RECOMMENDED FINISH

P = Fixation Pivots PCB

- P = 1. Without fixation pivots
- P = 2. With fixation pivots