

# INSULATION DISPLACEMENT CONNECTOR



## 2630 SERIES. 2.54 mm. (0.100"). Female Connector


### Features

- Available in 2 through 24 circuits
- Insulator Material: Nylon UL 94V-2
- Contact Material: Tinned copper alloy
- Mates with single row 2.54 mm. headers
- Optional: Dust Cover
- Low cost termination



### Dimensional Information

### Ordering and Dimensional Information

#### Without Polarisation

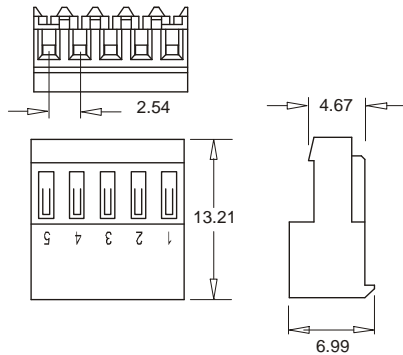

#### With Polarisation

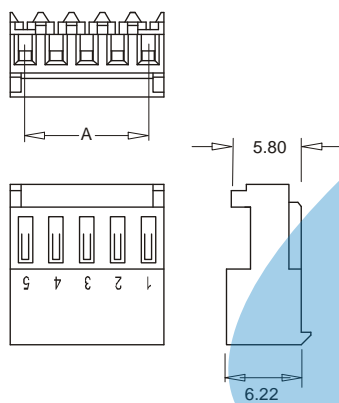

**2630 - 2- XX- P- L- E**  
 1 2 3 4 5 6

#### 1. CONNECTOR SERIES

#### 2. PLATING OPTIONS

- Tinned.

#### 3. (XX) CIRCUIT SIZE

- Available in 2 through 24 circuits

#### 4. (P) WIRE RANGES

- P = 2. AWG 22
- P = 3. AWG 24
- P = 4. AWG 26
- P = 5. AWG 28

#### 5. (L) POLARISING OPTIONS

- L = 1. With Polarisation
- L = 2. Without Polarisation

#### 6. (E) CONNECTOR TYPE


- E = 1. Closed end Type
- E = 2. Feed Thru Type

#### DIMENSIONS: (In mm.)

Circuit Size	Dim. A	Dim. B
XX	2.54 x (xx - 1)	2.54 x (xx)


XX = Number of circuits

#### Feed-Thru Strain Relief Cover

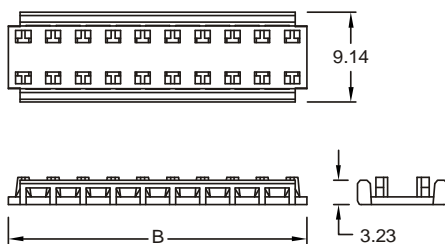

Part Number: **2630-00NN**  
 NN = N° of circuits

#### Closed End Strain Relief Cover

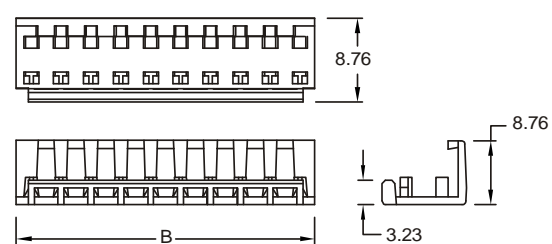

Part Number: **2630-01NN**  
 NN = N° of circuits