

DIN 41612 EUROCARD CONNECTOR



2319 SERIES Female IDC C Type


Features

- Available in 64 and 96 circuits
- Insulator Material: PBT UL 94V-0
- For mount in 9127 series cable (64 circuits) and 9084 Series cable (96 circuits)
- Contact Material: Phosphor Bronze
- Contact Resistance: 30 mill Ω max. AT 6V DC 0.3A
- Insulator Resistance: 1000 M Ω min. AT 500V DC
- Operating Temperature: -40°C to +105°C

Dimensional Information

Ordering

Circuit Size	Type	Configuration	Part Number	Dimensions			
				A	B	C	D
32	C/2	a + c	2319 - T321	55.00 (2.165)	38.10 (1.500)	50.00 (1.968)	44.40 (1.748)
48	C/2	a + b + c	2319 - T481	55.00 (2.165)	38.10 (1.500)	50.00 (1.968)	44.40 (1.748)
64	C	a + c	2319 - T641	95.00 (3.740)	78.74 (3.100)	90.00 (3.543)	85.00 (3.346)
96	C	a + b + c	2319 - T961	95.00 (3.740)	78.74 (3.100)	90.00 (3.543)	85.00 (3.346)

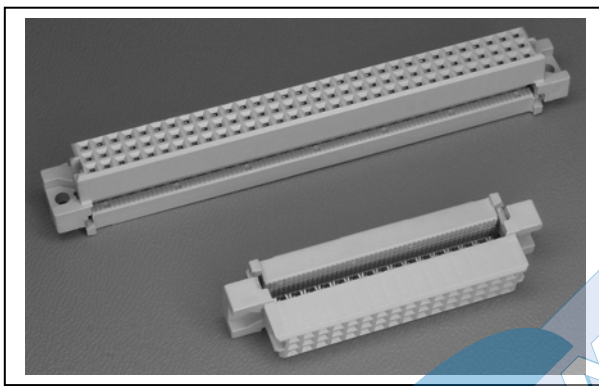

T = Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over 50 μ nickel.
- T = 5. 15 μ gold over 50 μ nickel
- T = 6. 30 μ gold over 50 μ nickel

