0.50mm HORIZONTAL SMT ZIF CONNECTOR

0515 SERIES. 0.50mm(0.020"). For PCB Solder

Features

- Available in 06 to 50 circuits
- Insulation: High temperature plastic UL 94V-0 col. nature
- Slider: High temperature plastic UL 94V-0 colour Brown
- Actuator designed easy for FFC/FPC installation
- Contact Material: Tin plated over copper alloy Upside or Downside contact
- With fixed metal tabs to secure connector in place
- Available in Tube or Reel packing

Dimensional Information

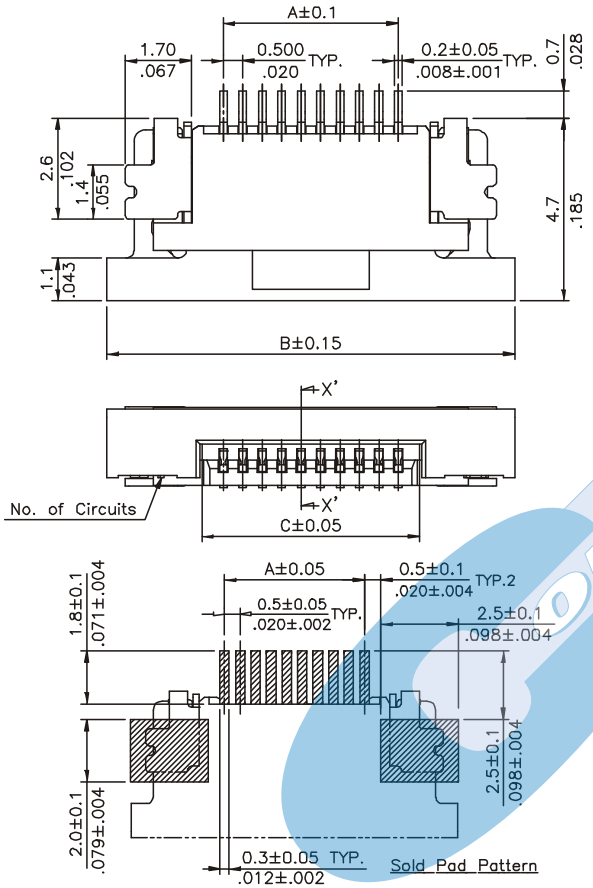

A = 0.50 * No. of Spaces
B = A + 6.0
C = A + 1.1

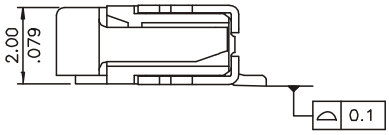

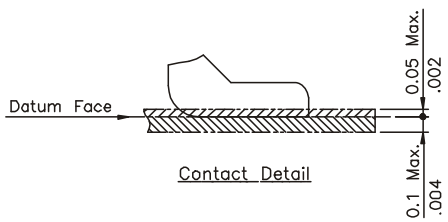

Ordering and Dimensional Information

0515 -	2-	XX-	S	E
1	2	3	4	5

1. Series

2. (T) Finish Of Contacts

- Tin Plated available

3. (XX) Circuit Size

- Available in 06 through 50 circuits

4. (S) Options

- E = **1.** Upside Contact
- E = **2.** Downside Contact

5. (E) Code Packing

- E = **1.** PAD + TUBE
- E = **2.** PAD + REEL

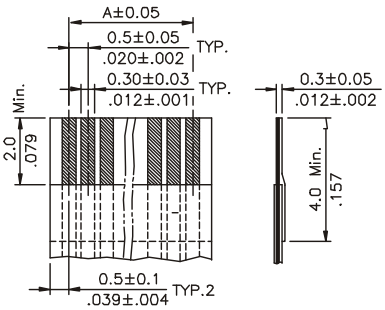

Accommodated FFC/FPC



SEC.: X–X'



SEC.: X–X'

ONEXCON