

RIGHT ANGLE DIP PCB RECEPTACLE



8152 SERIES. For PCB Solder. With Hooks

Features

- Available in 20, 26, 36, 50 and 100 circuits
- Excellent I/O connector
- Wire size (AWG 26 to 28)
- Ribbon contact design
- Contact Material: Phosphor bronze
- Excellent EMI / ESD protection
- Easy to use latching system (One-Touch Lock)
- Shell: Cold roller Steel
- Insulator Material: PBT + Glass-Fibre UL 94V-0
- Accepts: 8160, 8161 and 8162 series Hoods
- Staggered four rows of 2.54mm(0.100") spacing with row-to-row spacing of 1.905mm(.075") for board side
- For electric equipments of high reliability and high density packaging


Dimensional Information

Ordering and Dimensional Information

Circuit Size	Part Number	Dimensions				
		A	B	C	D	E
20	8152 - T020	33.38 (1.314)	27.45 (1.081)	16.43 (0.647)	11.43 (0.450)	25.86 (1.019)
26	8152 - T026	37.19 (1.464)	31.26 (1.231)	20.30 (0.799)	15.24 (0.600)	24.64 (0.970)
36	8152 - T036	43.54 (1.714)	37.61 (1.481)	26.60 (1.047)	21.59 (0.850)	30.99 (1.220)
50	8152 - T050	52.43 (2.064)	46.50 (1.831)	35.50 (1.398)	30.48 (1.200)	39.88 (1.570)
100	8152 - T100	84.18 (3.314)	78.25 (3.081)	67.30 (2.650)	62.23 (2.450)	71.63 (2.820)

T = Contact Plating

- T = 3. Gold flash over 50µ" nickel
 - T = 4. 10µ" gold over 50µ" nickel
 - T = 5. 15µ" gold over 50µ" nickel
 - T = 6. 30µ" gold over 50µ" nickel
- Recommended Finish

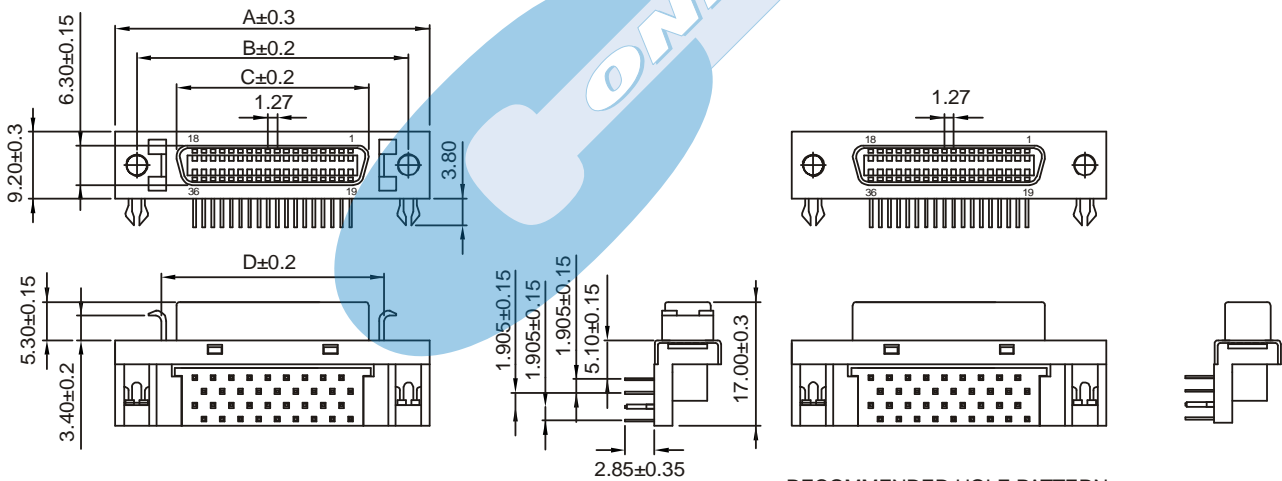

RECOMMENDED HOLE PATTERN

