

STRAIGHT MICRO POWER CONNECTOR PCB






5757 SERIES. Pitch 3.00 mm. (0.118"). High current / High density.

Features

- Available in 2 to 24 circuits
- Insulator Material: Nylon 6T, black colour; UL 94V-0
- Mates with 5740 series housing
- With metal board lock
- Contact Material: Brass of 0.64 mm square wire; Tin plating as standard
- Max. Current rating: 5 A
- For further options contact our Sales Department

Dimensional Information

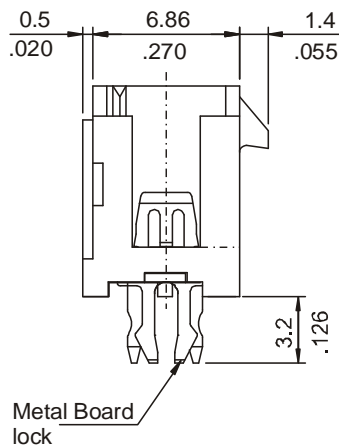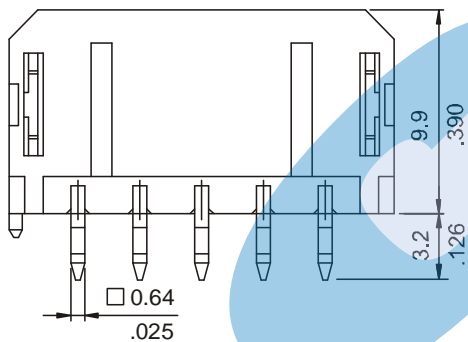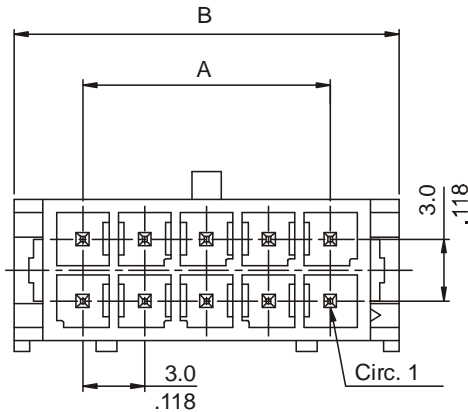

Ordering and dimensional Information

| Circuits | Part Number | Dimensions | |
|----------|-------------|---------------|---------------|
| | | A | B |
| 2 | 5757 - T021 | - | 6.70 (.264) |
| 4 | 5757 - T041 | 3.00 (.118) | 9.70 (.382) |
| 6 | 5757 - T061 | 6.00 (.236) | 12.70 (.500) |
| 8 | 5757 - T081 | 9.00 (.354) | 15.70 (.618) |
| 10 | 5757 - T101 | 12.00 (.472) | 18.70 (.657) |
| 12 | 5757 - T121 | 15.00 (.591) | 21.70 (.854) |
| 14 | 5757 - T141 | 18.00 (.709) | 24.70 (.972) |
| 16 | 5757 - T161 | 21.00 (.827) | 27.70 (1.091) |
| 18 | 5757 - T181 | 24.00 (.945) | 30.70 (1.209) |
| 20 | 5757 - T201 | 27.00 (1.063) | 33.70 (1.327) |
| 22 | 5757 - T221 | 30.00 (1.181) | 36.70 (1.445) |
| 24 | 5757 - T241 | 33.00 (1.299) | 39.70 (1.563) |

T = Plating Options

- T = 2. Tin plated (RECOMMENDED FINISH)

