

FEMALE HEADER CONEX-FLEX








1330 SERIES. 2.54 mm. (0.100"). Insulator displacement

Features

- Available in 4, 6, 8, 10, 12, 14, 16, 18, 20 and 26 circuits
- Insulator material: reinforced PBT UL 94V-0
- Material: phosphor bronze
- Maximum current: 1 Amp. DC
- Contact resistance: 30 mΩ max
- Isolation resistance: 3.000 MΩ minimum
- Dielectric rigidity: 500V AC / 1 minute
- Work temperature: -40°C to +105°C
- For flat cable 1.27 mm.
- Mates with 1332 and 1333 serie

Dimensional information:

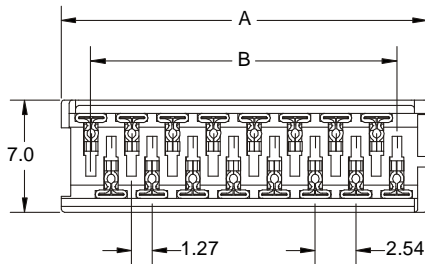

Ordering and dimensional information:

Circuit Size	Part Number	Dimensions	
		A	B
04	1330-1041	7.59 (0.299)	3.81(0.150)
06	1330-1061	10.13 (0.399)	6.35(0.250)
08	1330-1081	12.67 (0.499)	8.89(0.350)
10	1330-1101	15.21 (0.599)	11.43(0.450)
12	1330-1121	17.75 (0.699)	13.97(0.550)
14	1330-1141	20.29 (0.799)	16.51(0.650)
16	1330-1161	22.83 (0.899)	19.05(0.750)
18	1330-1181	25.37 (0.999)	21.59(0.850)
20	1330-1201	27.91 (1.099)	24.13(0.950)
26	1330-1261	35.53 (1.399)	31.75(1.250)

T = Contact Plating

- T = 2. Tin plated
 - T = 3. Gold flash over 50μ" nickel.
- Recommended Finish
- T = 5. 15μ" gold over 50μ" nickel
 - T = 6. 30μ" gold over 50μ" nickel
 - T = 13. Selective gold flash over 50μ" nickel
 - T = 15. 15μ" selective gold over 50μ" nickel
 - T = 16. 30μ" selective gold over 50μ" nickel

