

CRIMP TERMINAL



1021 SERIES. 1.00 mm. (0.039") Pitch housing

General Features

- Accommodates wire range AWG 28 through 32
- Use in housing 1.00 mm pitch 1020 series
- Gold plated dual beam contact with locking lance
- Maximum insulation diameter 0.75 mm (0.030")

Materials

- Contact: Cooper alloy gold plated
- Operating temperature -40°C to +85°C
- RoHS compliant


Dimensional Information

Electrical Features

- Current rating: < 1 A
- Contact resistance: < 30 mΩ

Mechanical Features

- Durability: 25 cycles
- Wire pull-out force:
 - 1.30 Kg 28 AWG
 - 0.80 Kg 30 AWG
 - 0.60 Kg 32 AWG

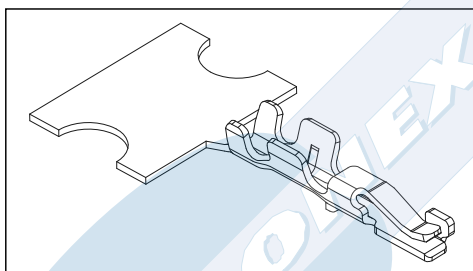

1021 - 3- 00- E

1

2

1. Terminal Serie

2. (E) Packing Options

- E = 0. Chain
- E = 1. Loose Piece

