

CRIMP TERMINAL



1026 SERIES. 1.25 mm. (0.049") Pitch housing

General Features

- Accommodates wire range AWG 28 through 32
- Use in housing 1.25 mm pitch 1025 series
- Tin plated contact with locking lance
- Maximum insulation diameter 0.90 mm (0.035")

Materials

- Contact: Phosphor bronze
- Operating temperature -25°C to +85°C



Electrical Features

- Current rating: < 1 A
- Contact resistance: < 20 mΩ

Mechanical Features

- Durability: 25 cycles
- Wire pull-out force:
 - < 1.30 Kgf 28 AWG
 - < 0.80 Kgf 30 AWG
 - < 0.60 Kgf 32 AWG

Dimensional Information

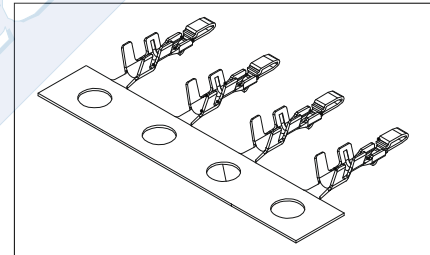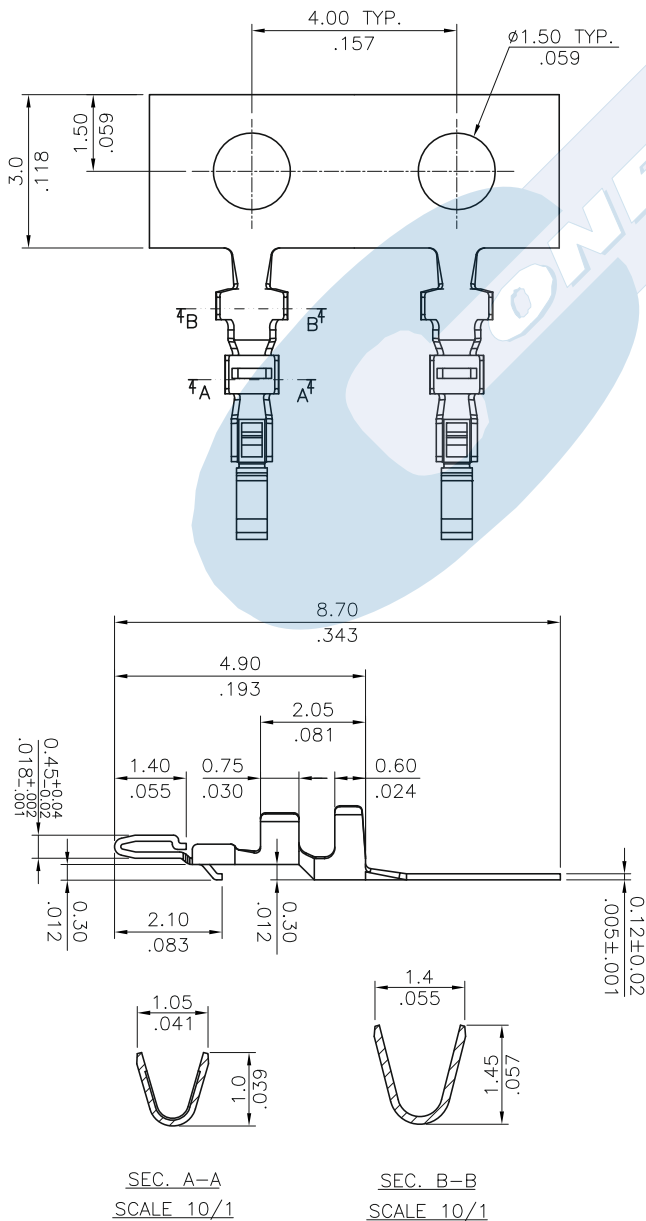

1026 - 2- 00- E

1 2

1. Terminal Serie

2. (E) Packing Options

- E = 0. Chain
- E = 1. Loose Piece

