

SINGLE ROW CRIMP CONNECTOR HOUSING



1152 SERIES. 1.25 mm. (0.049") Pitch.


General Features

- Available in 2 through 15 circuits
- Mates with 1.25 mm female housing 1154 series
- Compact, low profile design
- Latch housing secure terminal in housing and provide extra terminal retention
- Use crimp terminal 1153. Wire to wire connections

Materials

- Insulator: Polyester 94 V-0, colour nature
- Operating temperature. -25°C to +85°C
- RoHS compliant

Dimensional Information

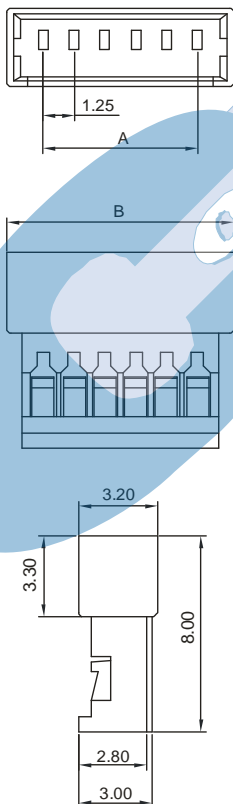

Electrical Features

- Voltage rating: < 125 V
- Current rating: < 1 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 250 V AC/minute
- Insulation resistance: >100 MΩ

Mechanical Features

- Durability: 25 cycles



1152 - 2- XX- 1
1 2 3

1. Connector Serie

3. (XX) Number of circuits

- Available in 2 through 15 circuits

Dimensions:

$$A = 1.25 \times (XX-1)$$

$$B = 1.25 \times (XX) + 1.75$$

(XX) = Number of circuits