

SINGLE ROW SIDE ENTRY HEADER



1157 SERIES. 1.25 mm. (0.049") pitch.


General Features

- Available in 2 through 15 circuits
- Mates with 1.25 mm crimp housing 1154 serie
- Tin plated pin
- Locking slots provide secure mating
- Polarization and low profile

Materials

- Insulator: Polyester 66 UL 94 V-0
- Contact: Tin plated brass
- Operating temperature: -40°C to +85°C
- RoHS compliant

Dimension Information

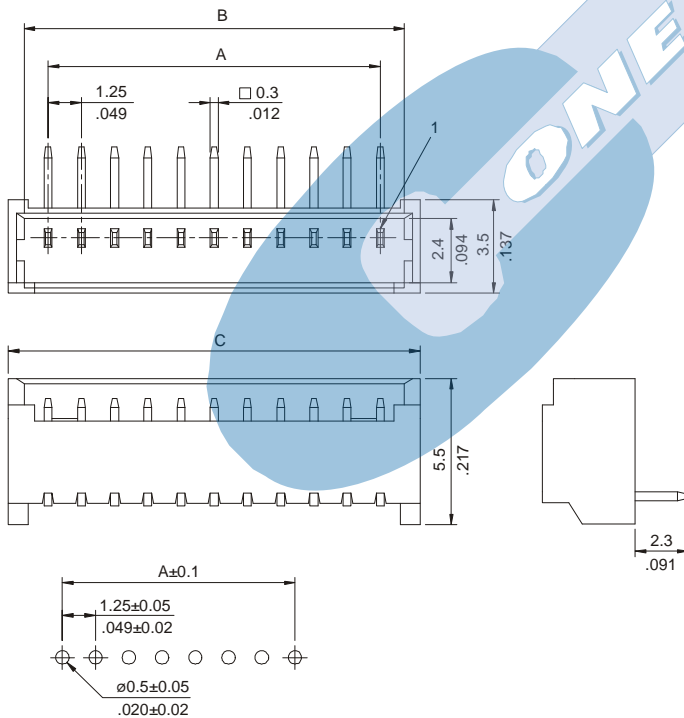


Electrical Features

- Voltage rating: < 125V
- Current rating: < 1 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 250 V AC/minute
- Insulation resistance: >100 MΩ

Mechanical Features

- Pin retention force to insulator: > 0.80 Kg f
- Durability: 25 cycles



1157 - T- XX- 1
1 2 3 4

1. Connector Serie

2. (T) Contacts Plating

- T = 2. Tin-plated.
RECOMMENDED FINISH

3. (XX) Number Of Contacts

- Available in 2 through 15 circuits

Dimensions: (In mm.)

$$A = 1.25 \times (XX-1)$$

$$B = 1.25 \times (XX)+1.85$$

$$C = 1.25 \times (XX)+0.65$$