

# CRIMP TERMINAL



## 1167 SERIES. 1.25 mm. (0.049") Pitch housing.


### General Features

- Accommodates wire range AWG 28 through 32
- Use in housing 1.25 mm pitch 1165 and 1166 series
- Tin plated box contact with locking lance
- Maximum insulation diameter 1.00 mm (0.039")

### Materials

- Contact: Phosphor bronze
- Operating temperature -25°C to +85°C

### Dimensional Information

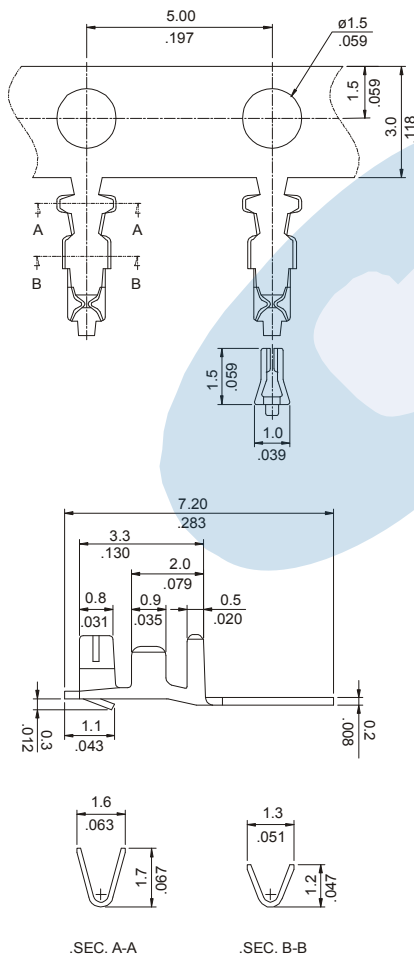


### Electrical Features

- Current rating: < 1 A
- Contact resistance: < 20 mΩ

### Mechanical Features

- Durability: 25 cycles
- Wire pull-out force:  
1.30 Kg 28 AWG  
0.80 Kg 30 AWG  
0.60 Kg 32 AWG

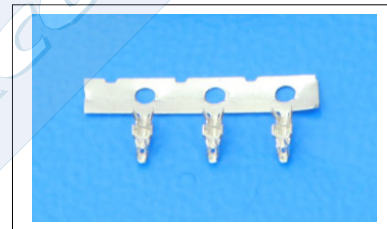

**1167 - T- 00- E**  
1 2 3

#### 1. Terminal Serie

#### 2. (T) Contact Plating

- T = 2. Tin plated.
- T = 3. Gold flash over nickel.

#### 3. (E) Packing Options

- E = 0. Chain
- E = 1. Loose piece