

# SINGLE ROW SIDE ENTRY SMT HEADER



## 1179 SERIES. 1.25 (0.049") mm pitch.



### General Features

- Available in 2 through 20 circuits
- Mates with 1.25 mm crimp housing 1175 series
- Tin plated pin
- Soldering tabs for PCB fixing
- Polarization and low profile. Positive lock

### Materials

- Insulator: High temperature plastic UL 94 V-0
- Contact: Tin plated brass
- Operating temperature: -25°C to +85°C
- RoHS Compliant

### Dimension Information

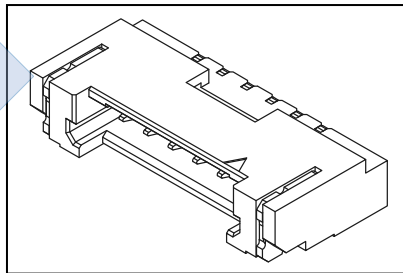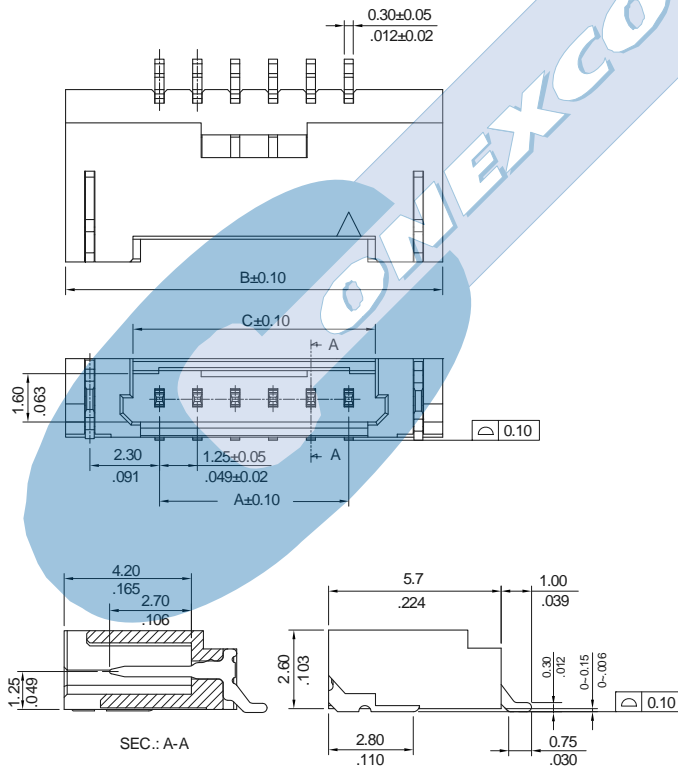

**1179 - T- XX- 1 E**  
 1 2 3 4

### 1. Connector Serie

### 2. (T) Contacts Plating

- T = 2. Tin-plated.  
**RECOMMENDED FINISH**

### 3. (XX) Number of circuits

- Available in 2 through 20 circuits

### 4. (E) Packing Options

- E = 1. Pad + Tube
- E = 2. Pad + Reel

### Dimensions: (In mm.)

$A = 1.25 \times (XX-1)$   
 $B = 1.25 \times (XX-1) + 4.95$   
 $C = 1.25 \times (XX-1) + 0.50$

(XX) = Number of circuits

