

# TOP ENTRY MALE CONNECTOR



## 1332 SERIES. 2.54 mm. (0.100") pitch.



### General Features

- Available in 4 through 26 circuits
- Mates with IDC connectors 1330 series
- Allows connections cable to PCB

### Materials

- Insulator: GF polyester UL 94V-0
- Terminal: Phosphor bronze
- Operating temperature. -25°C to +85°C
- RoHS compliant

### Dimension Information

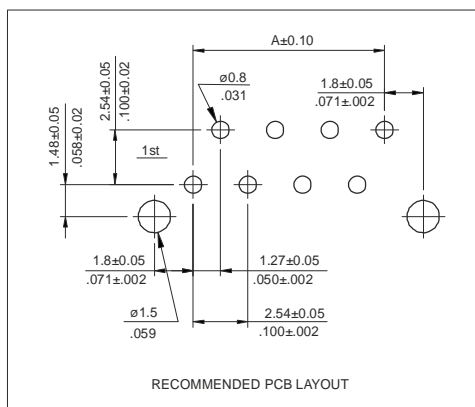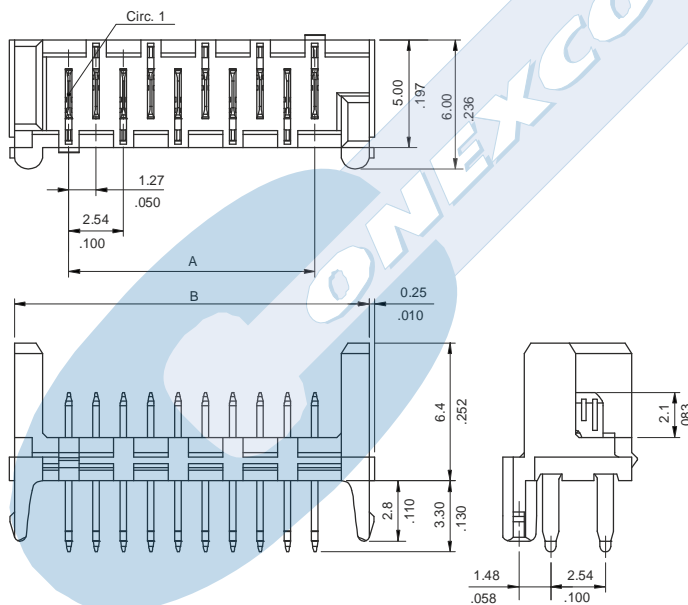


### Electrical Features

- Voltage rating: < 250V
- Current rating: < 1.20 A
- Contact resistance: < 15 mΩ
- Dielectric withstanding Voltage: 750 V AC/minute
- Insulation resistance: >1000 MΩ

### Mechanical Features

- Pin retention force to insulator: > 0.50 Kgf
- Mating force: > 0.50 Kgf per contact
- Un-mating force: > 0.10 Kgf per contact
- Durability: 25 Cycles

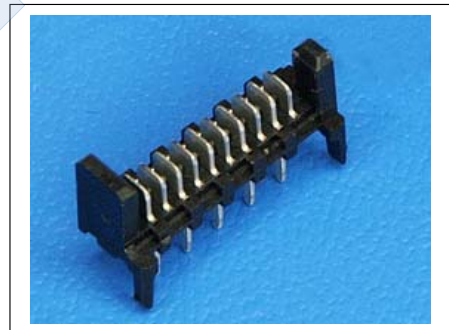

### Ordering Information:

**1332 - T- XX- 1**  
 1            2            3            4

1. Connector Series

2. (T) Contact Plating

- T = 2. Tin plated

3. (XX) Number of circuits

- Available in 4 through 26 circuits

Dimensions: (In mm.)

A = 1.27 x (XX\*-1)

B = 1.27 x (XX\*)+3.78