

# DUAL ROW TOP ENTRY SMT HEADER



## 1344 SERIES. 1.27 x 1.27 mm. (0.050 x 0.050") pitch.




### General Features

- Available in 6, 8, 10, 12, 14, 16, 20, 22, 26, 30, 34, 36, 40, 44, 50, 60, 68 and 80 circuits
- Mates with IDC connectors 1341 series
- Gold plated 0.40 mm square pin
- Fully shrouded with polarized slot


### Materials

- Insulator: PA 6T UL 94V-0
- Terminal: brass
- Operating temperature: -40°C to +105°C
- RoHS compliant


### Dimension Information

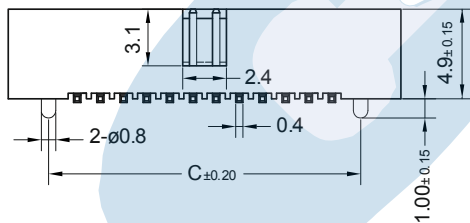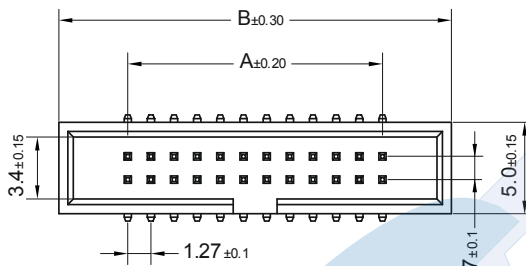

With locating Peg



Without locating Peg

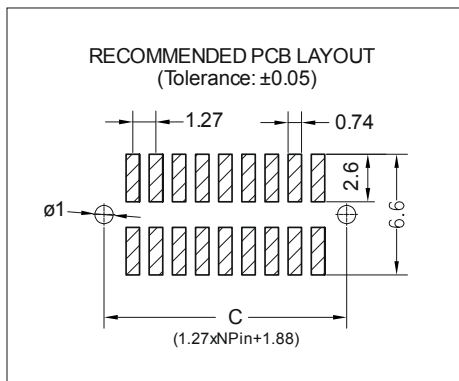


### Electrical Features

- Voltage rating: < 250V
- Current rating: < 1 A
- Contact resistance: < 30 mΩ
- Dielectric withstanding Voltage: 250 V AC/minute
- Insulation resistance: >1000 MΩ

### Mechanical Features

- Durability: 50 Cycles

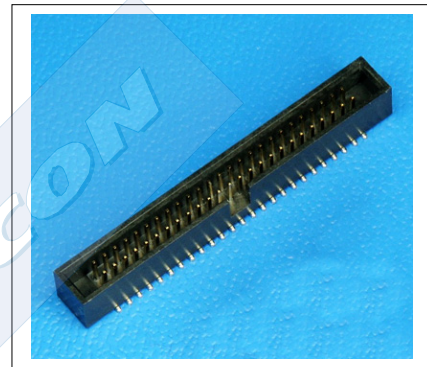

### Ordering Information:

**1344 - T - XX - P - E**  
 1            2            3            4            5

#### 1. Connector Series

#### 2. (T) Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over nickel  
Recommended Finish
- T = 5. 15μ" gold over nickel
- T = 6. 30μ" gold over nickel

#### 3. (XX) Number of circuits

- Available in 6 through 80 circuits

#### 4. (P) Fixing Options

- P = 0. Without locating peg
- P = 1. With locating peg

#### 4. (XX) Packing Options

- E = 1. Tube + Pad
- E = 2. Reel + Pad

Dimensions: (In mm.)

$$A = 1.27 \left( \frac{XX}{2} - 1 \right); \quad B = 1.27 \left( \frac{XX}{2} \right) + 6.20; \quad C = 1.27 \left( \frac{XX}{2} \right) + 1.88$$

(XX) = Number of circuits