

D/ ROW SIDE ENTRY HEADER EJECT LATCH



1347A SERIES. 1.27 x 1.27 mm. (0.050 x 0.050") pitch.



General Features

- Available in 10, 14, 16, 20, 24, 26, 30, 34, 40, 44, 50 and 60 circuits
- Mates with IDC connectors 1341 series
- Gold plated 0.40 mm square pin
- Fully shrouded with polarized slot. With eject latch

Materials

- Insulator: LCP, glass reinforced, rated UL 94V-0
- Terminal: Phosphor bronze
- Operating temperature. -25°C to +85°C
- RoHS compliant

Dimension Information

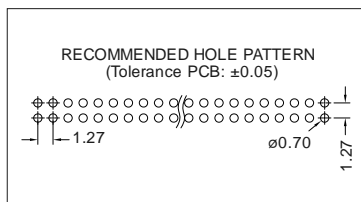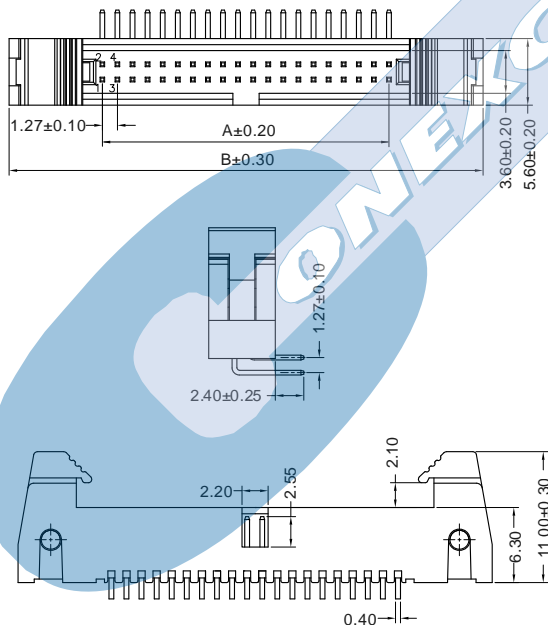

Electrical Features

- Voltage rating: < 250V
- Current rating: < 1 A
- Contact resistance: < 30 mΩ
- Dielectric withstanding Voltage: 250 V AC/minute
- Insulation resistance: >1000 MΩ

Mechanical Features

- Durability: 50 Cycles



Ordering Information:

1347A - T- XX- 0
1 2 3 4

1. Connector Series

2. (T) Contact Plating

- T = 2. Tin plated
- T = 3. Gold flash over nickel
Recommended Finish
- T = 5. 15μ" gold over nickel
- T = 6. 30μ" gold over nickel

3. (XX) Number of circuits

- Available in 10 through 60 circuits

Dimensions: (In mm.)

$$A = 1.27 \left(\frac{XX}{2} - 1 \right) \quad B = 1.27 \left(\frac{XX}{2} \right) + 13.23$$

(XX) = Number of circuits