

CRIMP TERMINAL



1557 SERIES. 1.50 mm. (0.059") Pitch housing





General Features

- Accommodates wire range AWG 24 through 28
- Use in housing 1.50 mm pitch 1555 and 1556 series
- Tin plated box contact with locking lance
- Maximum insulation diameter 1.28 mm (0.050")


Materials

- Contact: Phosphor bronze
- Operating temperature -40°C to +85°C

Dimensional Information

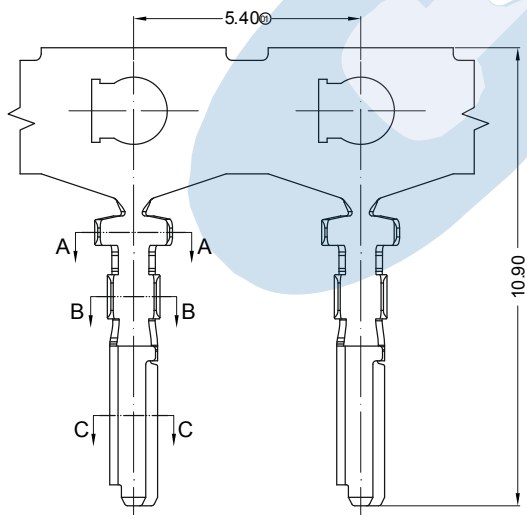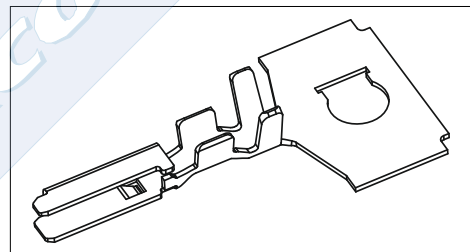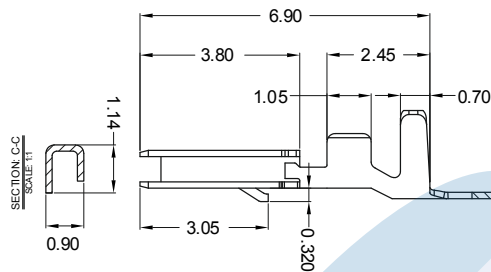

SECTION: A-A
SCALE: 1:1



SECTION: B-B
SCALE: 1:1

Electrical Features

- Current rating: < 2 A
- Contact resistance: < 20 mΩ

Mechanical Features

- Durability: 25 cycles
- Wire pull-out force:
 - 3.0 Kg 24 AWG
 - 2.0 Kg 26 AWG
 - 1.0 Kg 28 AWG

1557 - 2 - 00 - E

1

2

1. Terminal Serie

2. (E) Packing Options

- E = 0. Chain
- E = 1. Loose piece