

SINGLE ROW CRIMP CONNECTOR HOUSING



1570 SERIES. 1.50 mm. (0.059") Pitch.


General Features

- Available in 2 through 15 circuits
- Mates with 1.50 mm header 1571, 1572, 1575, 1576 and 1577 series
- Latch housing secure terminal in housing and provide extra terminal retention
- Use crimp terminal 1573

Materials

- Insulator: Polyester UL 94 V-0
- Operating temperature. -25°C to +85°C
- RoHS compliant

Dimensional Information

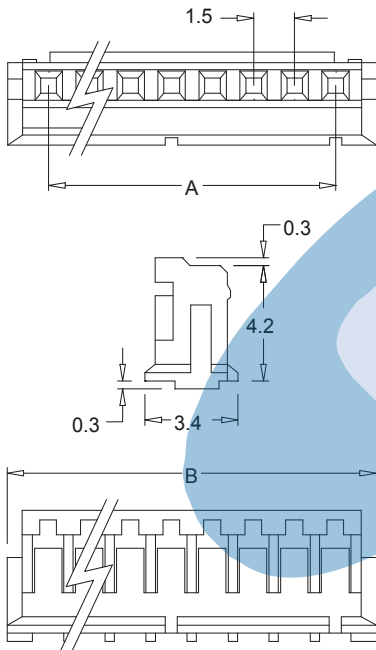

Electrical Features

- Voltage rating: < 100 V
- Current rating: < 1 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 250 V AC/minute
- Insulation resistance: >100 MΩ

Mechanical features

- Contact insertion force: < 0.5 Kgf
- Contact retention force to the housing: > 0.8 Kgf
- Durability: 25 cycles



1570 - 2- XX- 1
1 2 3

1. Connector Serie

3. (XX) Number of circuits

- Available in 2 through 15 circuits

Dimensions: (in mm.)

A = 1.50 x (XX-1)

B = 1.50 x (XX)+1.50

(XX) = Number of circuits