

CRIMP TERMINAL



1573 SERIES. 1.50 mm. (0.059") Pitch housing

General Features

- Accommodates wire range AWG 26 through 32
- Use in housing 1.50 mm pitch 1570 series
- Tin plated box contact with locking lance
- Maximum insulation diameter 1.20 mm (0.047")

Materials

- Contact: Phosphor bronze
- Operating temperature -25°C to +85°C



Dimensional Information

Electrical Features


- Current rating: < 1 A
- Contact resistance: < 20 mΩ

Mechanical Features

- Durability: 25 cycles
- Wire pull-out force:
 - 2.0 Kg 26 AWG
 - 1.0 Kg 28 AWG
 - 0.80 Kg 30 AWG
 - 0.50 Kg 32 AWG

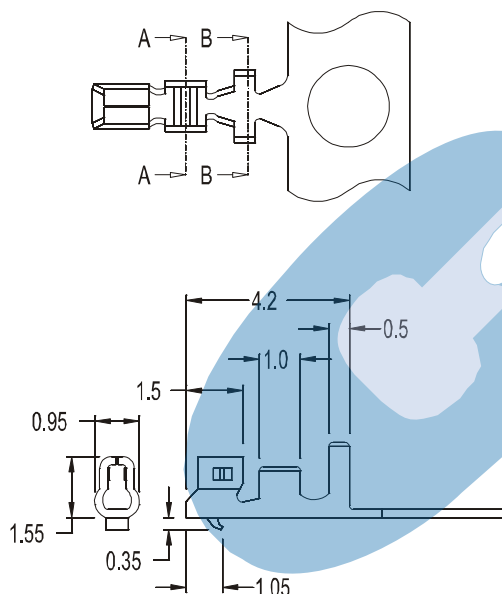

Sec. A - A



Sec. B - B



1573 - 2- 00- E
1 2

1. Terminal Serie

2. (E) Packing Options

- E = 0. Chain
- E = 1. Loose piece