

SINGLE ROW CRIMP CONNECTOR HOUSING



1578 SERIES. 1.50 mm. (0.059") Pitch.



General Features

- Available in 2 through 15 circuits
- Mates with 1.50 mm. pitch crimp housing 1570 series
- Latch housing secure terminal in housing and provide extra terminal retention
- Use crimp terminal 1579

Materials

- Insulator: Nylon 66 UL 94 V-0
- Operating temperature. -25°C to +85°C
- RoHS compliant

Dimensional Information

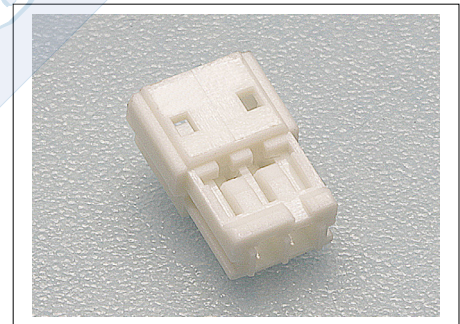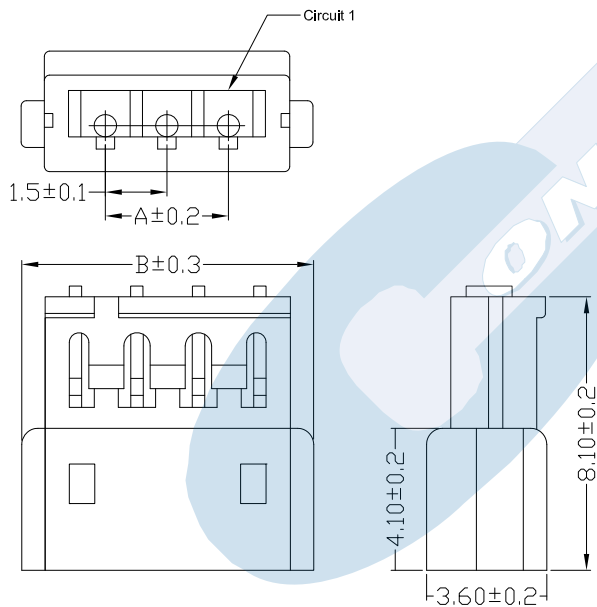

1578 - 2- XX- 1

1 2 3

1. Connector Serie

3. (XX) Number of circuits

- Available in 2 through 15 circuits

Poles	Dimensions (mm)	
	A	B
2	1.50	5.50
3	3.00	7.00
4	4.50	8.50
5	6.00	10.00
6	7.50	11.50
7	9.00	13.00
8	10.50	14.50
9	12.00	16.00
10	13.50	17.50
11	15.00	19.00
12	16.50	20.50
13	18.00	22.00
14	19.50	23.50
15	21.00	25.00