

# MALE CRIMP TERMINAL



## 1579 SERIES. 1.50 mm. (0.059") Pitch housing

### General Features

- Accommodates wire range AWG 28 through 32
- Use in housing 1.50 mm pitch 1578 series
- Tin plated male contact with locking lance
- Maximum insulation diameter 1.10 mm (0.043")

### Materials

- Contact: Phosphor bronze
- Operating temperature -25°C to +85°C



### Electrical Features

- Current rating: < 1 A
- Contact resistance: < 20 mΩ

### Mechanical Features

- Durability: 25 cycles
- Wire pull-out force: 1.0 Kg 28 AWG  
0.80 Kg 30 AWG  
0.50 Kg 32 AWG

### Dimensional Information

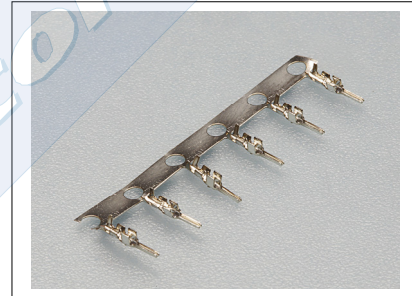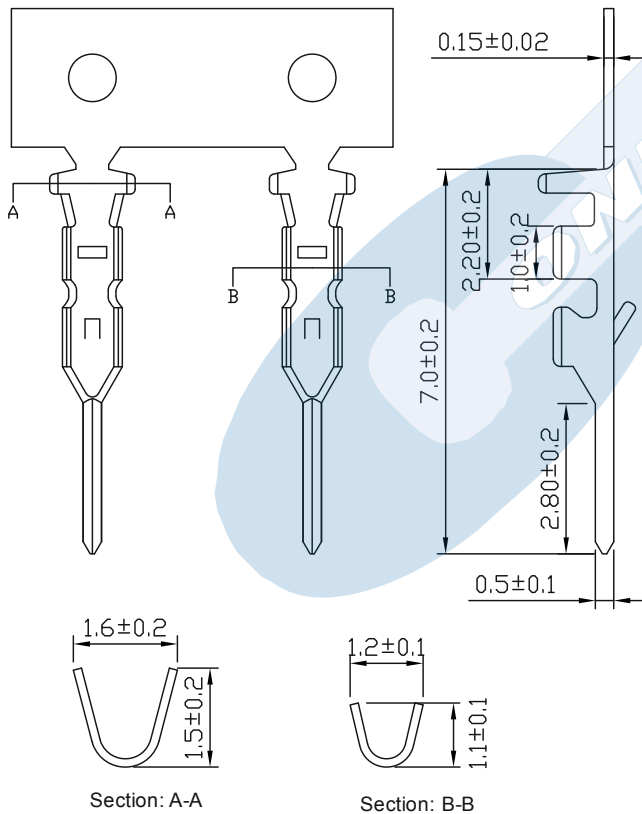

**1579 - 2- 00- E**  
1 2

#### 1. Terminal Series

#### 2. (E) Packing Options

- E = 0. Chain
- E = 1. Loose piece