SINGLE ROW CRIMP CONNECTOR HOUSING



1580 SERIES. 1.50 mm. (0.059") Pitch.

General Features

- Available in 2 through 15 circuits
- Mates with 1.50 mm header 1581 and 1582 series
- Latch housing secure terminal in housing and provide extra terminal retention
- Use crimp terminal 1583

Materials

- Insulator: Polyester UL 94 V-0
- Operating temperature. -40°C to +85°C
- RoHS compliant


Dimensional Information

Electrical Features

- Voltage rating: < 100 V
- .Current rating: < 1.5 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 250 V AC/minute
- Insulation resistance: >100 MΩ

Mechanical Features

Durability: 25 cycles

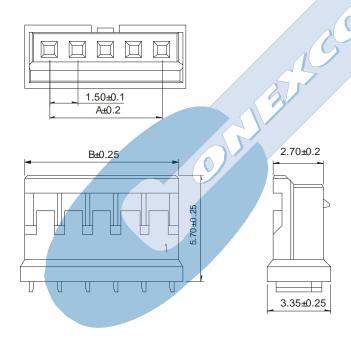



1580 - 2- XX- 1

- 1. Connector Serie
- 3. (XX) Number of circuits
- Available in 2 through 15 circuits

Dimensions: (in mm.)

 $A = 1.50 \times (XX^*-1)$

 $\mathbf{B} = 1.50 \times (XX) + 1.30$ (XX) = Number of circuits

A-XX FULL LINE CATALOGUE