

SINGLE ROW SIDE ENTRY SMT HEADER



1582 SERIES. 1.50 mm. (0.059") pitch.



General Features

- Available in 2 through 15 circuits
- Mates with 1.50 mm crimp housing 1580 serie
- Tin plated pin
- Locking slots provide secure mating
- Polarization and low profile

Materials

- Insulator: polyester UL 94 V-0
- Contact: Tin plated brass
- Operating temperature: -40°C to +85°C
- RoHS compliant

Dimension Information

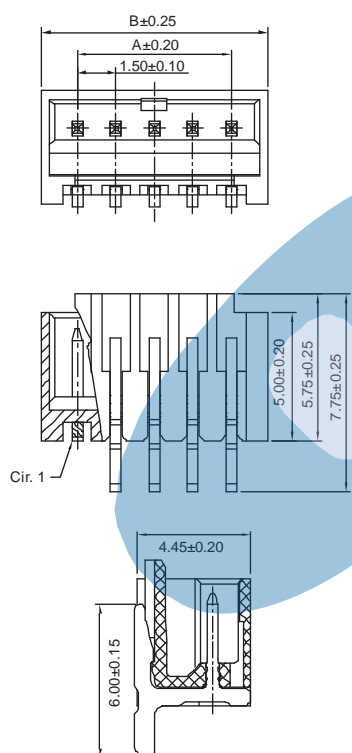


Electrical Features

- Voltage rating: < 125V
- Current rating: < 1.5 A
- Contact resistance: < 20 mΩ
- Dielectric withstanding voltage: 250 V AC/minute
- Insulation resistance: >100 MΩ

Mechanical Features

- Durability: 25 cycles



1582- T- XX- 1 E
1 2 3 4

1. Connector Serie

2. (T) Contacts Plating

- T = 2. Tin plated.
RECOMMENDED FINISH

3. (XX) Number of circuits

- Available in 2 through 15 circuits

4. (E) Packing Options

- E = 2. Reel+Pad

Dimensions: (In mm.)

A = 1.50 x (XX*-1)

B = 1.50 x (XX)+1.30

(XX) = Number of circuits