

CRIMP TERMINAL



1583 SERIES. 1.50 mm. (0.059") Pitch housing

General Features

- Accommodates wire range AWG 24 through 28
- Use in housing 1.50 mm pitch 1580 series
- Tin plated box contact with locking lance
- Maximum insulation diameter 1.10 mm (0.043")

Materials

- Contact: Phosphor bronze
- Operating temperature -40°C to +85°C



Dimensional Information

Electrical Features

- Current rating: 1.50 A (28 AWG)
2 A (26 AWG)
3 A (24 AWG)
- Contact resistance: < 20 mΩ

Mechanical features

- Durability: 25 cycles
- Wire pull-out force:
2.00 Kg 24 AWG
1.50 Kg 26 AWG
1.00 Kg 28 AWG

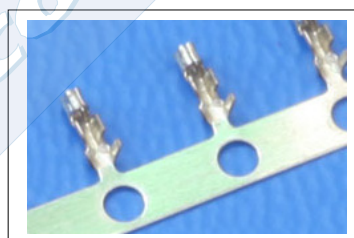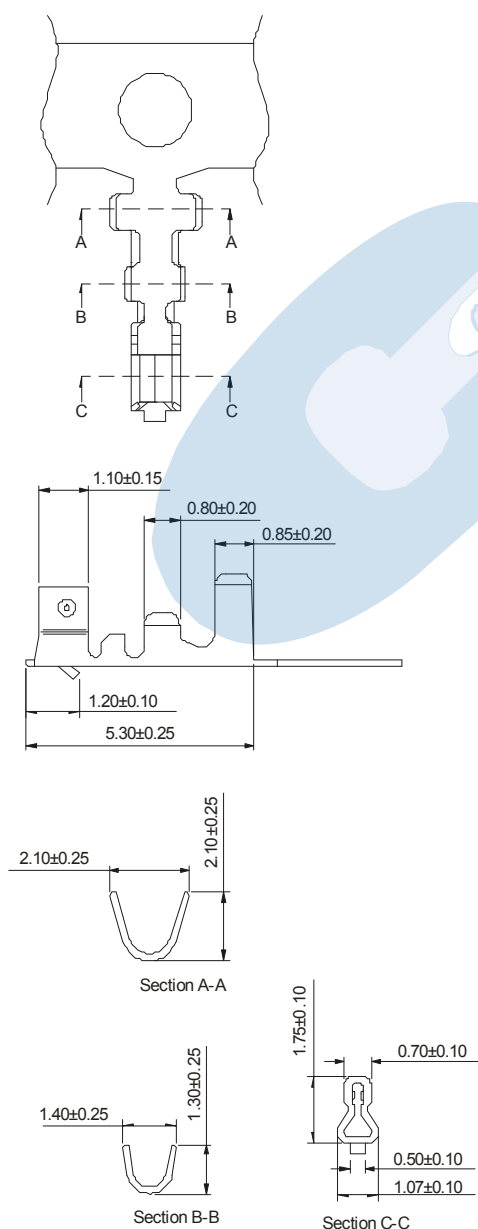

1583 - 2- 00- E
1 2

1. Terminal Serie

2. (E) Packing Options

- E = 0. Chain
- E = 1. Loose Piece