

CRIMP TERMINAL



1586 SERIES. 1.50 mm. (0.059") Pitch housing

General Features

- Accommodates wire range AWG 24 through 28
- Use in housing 1.50 mm pitch 1585 series
- Tin plated box contact with locking lance
- Maximum insulation diameter 1.10 mm (0.043")

Materials

- Contact: Phosphor bronze
- Operating temperature -25°C to +85°C



Electrical Features

- Current rating: < 3 A
- Contact resistance: < 20 mΩ

Mechanical Features

- Durability: 25 cycles
- Wire pull-out force: 2.0 Kg 24 AWG
1.0 Kg 26 AWG
0.80 Kg 28 AWG

Dimensional Information

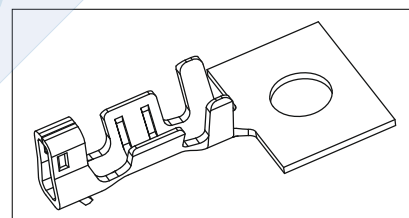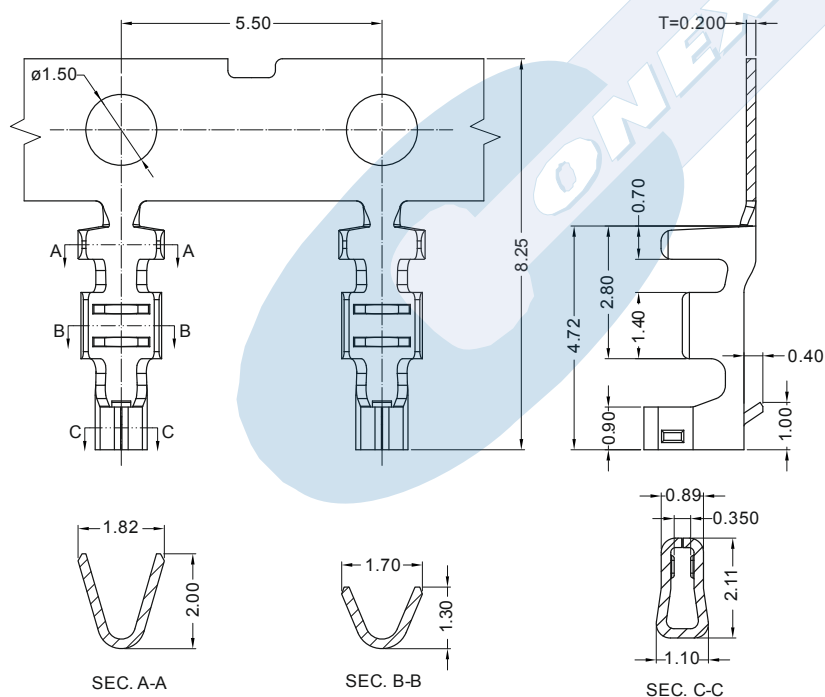

1586 - 2- 00- E
1 2

1. Terminal Serie

2. (E) Packing Options

- E = 0. Chain
- E = 1. Loose piece