

CRIMP TERMINAL



1984 SERIES. 2.00 mm. (0.079") Pitch

General Features

- Accommodates wire range AWG 22 through 28
- Use in housing 2.00 mm pitch 1980 series
- Box contact with tin plated locking lance
- Maximum insulation diameter 1.50 mm (0.059")

Materials

- Contact: Phosphor bronze
- Operating temperature -25°C to +85°C



Electrical Features

- Current rating: < 3 A
- Contact resistance: < 20 mΩ

Mechanical Features

- Durability: 25 cycles
- Wire pull-out force:
 - 4.00 Kgf 22 AWG
 - 3.00 Kgf 24 AWG
 - 2.00 Kgf 26 AWG
 - 1.00 Kgf 28 AWG

Dimensional Information

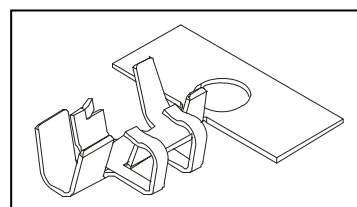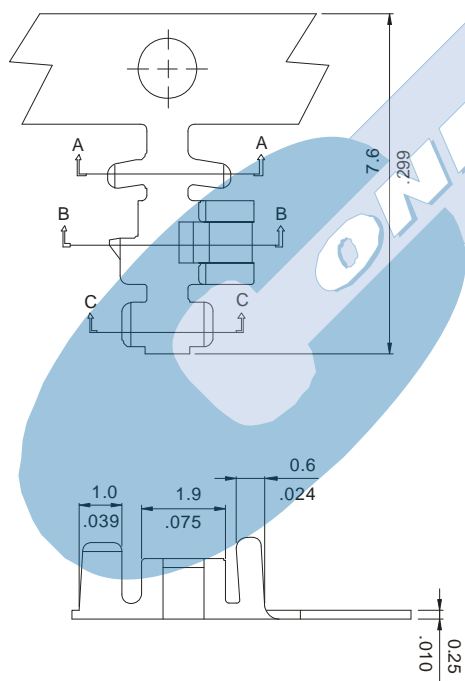

1984 - 2- 00- E

1 2

1. Terminal Serie

2. (E) Packing Options

- E = 0. Chain
- E = 1. Loose Piece